

R&S®ESW

EMI TEST RECEIVER

Specifications

Specifications
Version 12.00



ROHDE & SCHWARZ

Make ideas real



CONTENTS

| | |
|---|-----------|
| Definitions | 3 |
| Specifications..... | 4 |
| Frequency | 4 |
| Sweep time..... | 6 |
| Preselection and preamplifier | 6 |
| R&S®ESW-B24 low-noise amplifier (LNA) | 7 |
| IF and resolution bandwidths..... | 7 |
| Level..... | 8 |
| Sensitivity | 12 |
| Spurious responses..... | 21 |
| Level measurement uncertainty..... | 22 |
| R&S®ESW-B350/-B350R/-B1000/-B1000R time domain scan options | 24 |
| Time domain scan (TDS)..... | 26 |
| Measurement speed..... | 27 |
| Trigger functions..... | 28 |
| Audio demodulator | 28 |
| Inputs and outputs..... | 29 |
| General data..... | 32 |
| Options | 34 |
| R&S®ESW-B10 external generator control..... | 34 |
| R&S®ESW-B21 LO/IF connections for external mixers (not available for R&S®ESW8)..... | 34 |
| R&S®ESW-K980 health and utilization monitoring service (HUMS)..... | 35 |
| Ordering information | 36 |
| Options..... | 36 |
| Upgrades..... | 37 |
| Recommended extras..... | 38 |
| Warranty and service..... | 39 |

Definitions


General

Product data applies under the following conditions:

- Three hours of storage at ambient temperature followed by 30 minutes of warm-up operation
- Specified environmental conditions met
- Recommended calibration interval adhered to
- All internal automatic adjustments performed, if applicable

Specifications with limits

Represent warranted product performance by means of a range of values for the specified parameter. These specifications are marked with limiting symbols such as $<$, \leq , $>$, \geq , \pm , or descriptions such as maximum, limit of, minimum. Compliance is ensured by testing or is derived from the design. Test limits are narrowed by guard bands to take into account measurement uncertainties, drift and aging, if applicable.

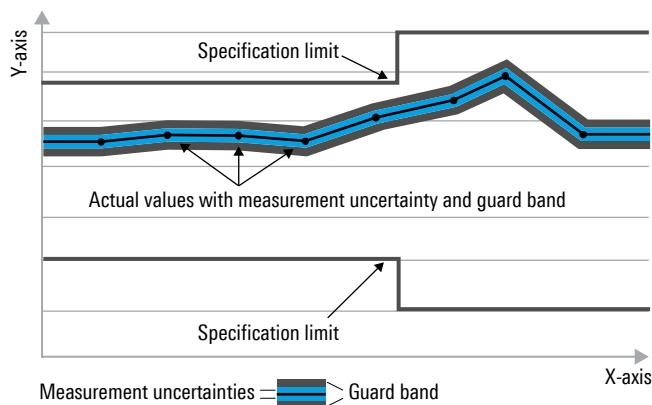

Non-traceable specifications with limits (n. trc.)

Represent product performance that is specified and tested as described under "Specifications with limits" above. However, product performance in this case cannot be warranted due to the lack of measuring equipment traceable to national metrology standards. In this case, measurements are referenced to standards used in the Rohde & Schwarz laboratories.

Specifications without limits

Represent warranted product performance for the specified parameter. These specifications are not specially marked and represent values with no or negligible deviations from the given value (e.g. dimensions or resolution of a setting parameter). Compliance is ensured by design.

Typical data (typ.)

Characterizes product performance by means of representative information for the given parameter. When marked with $<$, $>$ or as a range, it represents the performance met by approximately 80 % of the instruments at production time. Otherwise, it represents the mean value.

Nominal values (nom.)

Characterize product performance by means of a representative value for the given parameter (e.g. nominal impedance). In contrast to typical data, a statistical evaluation does not take place and the parameter is not tested during production.

Measured values (meas.)

Characterize expected product performance by means of measurement results gained from individual samples.

Uncertainties

Represent limits of measurement uncertainty for a given measurand. Uncertainty is defined with a coverage factor of 2 and has been calculated in line with the rules of the Guide to the Expression of Uncertainty in Measurement (GUM), taking into account environmental conditions, aging, wear and tear.

Device settings and GUI parameters are designated with the format "parameter: value".

Non-traceable specifications with limits, typical data as well as nominal and measured values are not warranted by Rohde & Schwarz.

In line with the 3GPP standard, chip rates are specified in million chips per second (Mcps), whereas bit rates and symbol rates are specified in billion bit per second (Gbps), million bit per second (Mbps), thousand bit per second (kbps), million symbols per second (Msps) or thousand symbols per second (ksps), and sample rates are specified in million samples per second (Msample/s). Gbps, Mcps, Mbps, Msps, kbps, ksps and Msample/s are not SI units.

Specifications

Unless otherwise stated, the specifications below are valid for all operating modes. For dedicated specifications for time domain scan with TDS optimization mode "max speed" with one of the options R&S®ESW-B350/-B350R/-B1000/-B1000R, refer to section R&S®ESW-B350/-B350R/-B1000/-B1000R time domain scan options.

Frequency

| | | |
|-----------------------------|----------------------------------|--------------------|
| Frequency range | R&S®ESW8 | |
| | input 1, DC coupled | 1 Hz to 8 GHz |
| | input 1, AC coupled | 10 MHz to 8 GHz |
| | R&S®ESW26 | |
| | input 1, DC coupled | 1 Hz to 26.5 GHz |
| | input 1, AC coupled | 10 MHz to 26.5 GHz |
| | R&S®ESW44 | |
| | input 1, DC coupled | 1 Hz to 44 GHz |
| | input 1, AC coupled | 10 MHz to 44 GHz |
| | all models | |
| | input 2, DC coupled | 1 Hz to 1 GHz |
| | input 2, AC coupled ¹ | 10 MHz to 1 GHz |
| Frequency resolution | | 0.01 Hz |


| | | |
|---|---|--|
| Reference frequency, internal | | |
| Accuracy | | $\pm(\text{time since last adjustment} \times \text{aging rate} + \text{temperature drift} + \text{calibration accuracy})$ |
| Aging per year | standard | $\pm 1 \times 10^{-7}$ |
| | with R&S®ESW-B4 OCXO precision frequency reference option | $\pm 3 \times 10^{-8}$ |
| Temperature drift (0 °C to +50 °C) | standard | $\pm 1 \times 10^{-7}$ |
| | with R&S®ESW-B4 OCXO precision frequency reference option | $\pm 1 \times 10^{-9}$ |
| Achievable initial calibration accuracy | standard | $\pm 1 \times 10^{-8}$ |
| | with R&S®ESW-B4 OCXO precision frequency reference option | $\pm 5 \times 10^{-9}$ |

| | | |
|--|---------------------------------|---|
| Frequency readout (analyzer mode) | | |
| Marker resolution | | 1 Hz |
| Uncertainty | | $\pm(\text{marker frequency} \times \text{reference accuracy} + 10\% \times \text{resolution bandwidth} + \frac{1}{2}(\text{span} / (\text{sweep points} - 1)) + 1 \text{ Hz})$ |
| Number of sweep (trace) points | default value | 1001 |
| | range | |
| | spectrum analyzer | 101 to 100001 |
| | EMI measurement | 101 to 200001 |
| Marker tuning frequency step size | marker step size = sweep points | span / (sweep points - 1) |
| | marker step size = standard | span / (default sweep points - 1) |
| Frequency counter resolution | | 0.001 Hz |
| Count accuracy | | $\pm(\text{frequency} \times \text{reference accuracy} + \frac{1}{2}(\text{last digit}))$ |
| Display range for frequency axis | | 0 Hz, 10 Hz to max. frequency |
| Resolution | | 0.1 Hz |
| Max. span deviation | | $\pm 0.1\%$ |

| | | |
|------------------------|--------------------------------|---|
| Receiver scan | | |
| Scan | | max. 10 subranges with different settings |
| Scan modes | | normal, time domain |
| Measurement time | normal scan, per frequency | 50 µs to 100 s |
| | time domain scan, per subrange | 50 µs to 100 s |
| Number of trace points | | up to 10 000 000 |
| Frequency step size | normal scan | min. 1 Hz |
| | time domain scan | $0.25 \times \text{resolution bandwidth}$ |

¹ Only available with pulse limiter = off.

| Spectral purity | | |
|------------------------|---|---|
| SSB phase noise | frequency = 1000 MHz, carrier offset | |
| | 10 Hz, without R&S®ESW-B4 option | -80 dBc (1 Hz) (nom.) |
| | 10 Hz, with R&S®ESW-B4 option | -90 dBc (1 Hz) (nom.) |
| | 100 Hz | -106 dBc (1 Hz), typ. -112 dBc (1 Hz) |
| | 1 kHz | < -125 dBc (1 Hz), typ. -130 dBc (1 Hz) |
| | 10 kHz | < -134 dBc (1 Hz), typ. -138 dBc (1 Hz) |
| | 100 kHz | < -136 dBc (1 Hz), typ. -140 dBc (1 Hz) |
| | 1 MHz | < -145 dBc (1 Hz), typ. -149 dBc (1 Hz) |
| | 10 MHz | -156 dBc (1 Hz) (nom.) |
| Residual FM | frequency = 1000 MHz, RBW = 1 kHz, sweep time = 100 ms | < 0.1 Hz (nom.) |

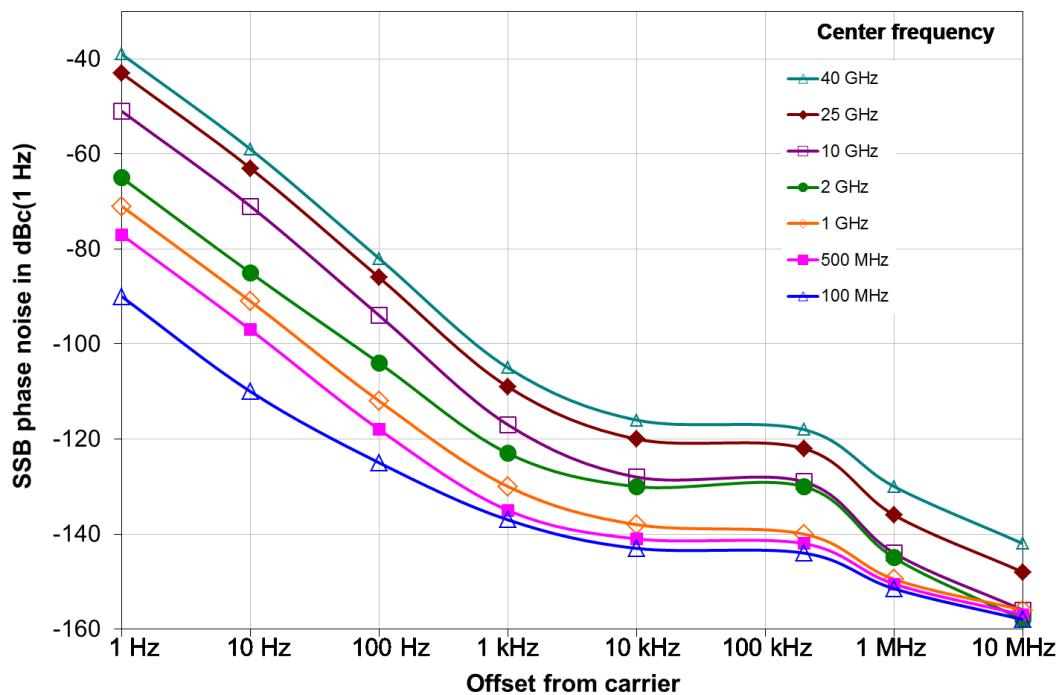

Typical phase noise at different center frequencies (with the R&S®ESW-B4 option for offsets ≤ 10 Hz)

Sweep time

| | | |
|---------------------|--------------|------------------------------|
| Sweep time range | span = 0 Hz | 1 µs to 16000 s |
| | span ≥ 10 Hz | 3 µs to 16000 s ² |
| Sweep time accuracy | span = 0 Hz | ±0.1 % (nom.) |
| | span ≥ 10 Hz | ±3 % (nom.) |

Preselection and preamplifier

| Preselection | | |
|--------------------------------|---|---------------------------------|
| State | receiver mode | always on |
| | analyzer mode | on/off (selectable) |
| Number of preselection filters | 21 | |
| Preselection filters | | |
| Bandwidths (–6 dB), nominal | 1 Hz to 150 kHz | 200 kHz, fixed lowpass filter |
| | 150 kHz to 30 MHz | 38 MHz, fixed bandpass filter |
| | 2 MHz to 30 MHz, selectable | 36 MHz, fixed bandpass filter |
| | 8 MHz to 30 MHz, selectable ³ | 30 MHz, fixed bandpass filter |
| | 30 MHz to 125 MHz | 134 MHz, fixed bandpass filter |
| | 125 MHz to 205 MHz | 141 MHz, fixed bandpass filter |
| | 205 MHz to 285 MHz | 146 MHz, fixed bandpass filter |
| | 285 MHz to 365 MHz | 142 MHz, fixed bandpass filter |
| | 365 MHz to 445 MHz | 156 MHz, fixed bandpass filter |
| | 445 MHz to 525 MHz | 136 MHz, fixed bandpass filter |
| | 525 MHz to 605 MHz | 126 MHz, fixed bandpass filter |
| | 605 MHz to 685 MHz | 141 MHz, fixed bandpass filter |
| | 685 MHz to 765 MHz | 131 MHz, fixed bandpass filter |
| | 765 MHz to 845 MHz | 128 MHz, fixed bandpass filter |
| | 845 MHz to 925 MHz | 132 MHz, fixed bandpass filter |
| | 925 MHz to 1001 MHz | 133 MHz, fixed bandpass filter |
| | 1001 MHz to 1795 MHz | 1044 MHz, fixed bandpass filter |
| | 1795 MHz to 2895 MHz | 1541 MHz, fixed bandpass filter |
| | 2895 MHz to 4895 MHz | 2452 MHz, fixed bandpass filter |
| | 4895 MHz to 6800 MHz | fixed highpass filter |
| | 6800 MHz to 8000 MHz | fixed highpass filter |
| | 8 GHz to 44 GHz | YIG filter |
| Notch filters | | |
| Reject band | selectable | 2400 MHz to 2483 MHz |
| | | 5725 MHz to 5875 MHz |
| Reject attenuation | 20 dB (nom.) | |
| Preamplifier | | |
| Range | 1 kHz to 8 GHz | |
| Gain | 20 dB (nom.) | |
| Location | in the signal path between preselection and 1st mixer, only available with preselection = on | |
| Interaction | preamplifier and LNA (R&S®ESW-B24 option) operate alternatively, preamplifier = on means LNA = off and vice versa | |

² The selected sweep time is the net data acquisition time (without the extra time needed for hardware settling or FFT processing).

³ Filter is only available for instruments starting from the following serial numbers: R&S®ESW8: 103055, R&S®ESW26: 103028, R&S®ESW44: 103048.

R&S®ESW-B24 low-noise amplifier (LNA)

| | | |
|-----------------|-----------|--|
| Frequency range | R&S®ESW8 | 150 kHz to 8 GHz |
| | R&S®ESW26 | 150 kHz to 26.5 GHz |
| | R&S®ESW44 | 150 kHz to 44 GHz |
| Gain | | 30 dB (nom.) |
| Location | | in the signal path between RF attenuator and preselection |
| Interaction | | preamplifier and LNA operate alternatively, LNA = on means preamplifier = off and vice versa |

IF and resolution bandwidths

| IF filters, sweep filters and FFT filters | | |
|---|---------------------------|--|
| Resolution bandwidths (-3 dB) | standard | 1 Hz to 10 MHz in 1/2/3/5 sequence |
| | with R&S®ESW-B8E option | 20 MHz, 30 MHz, 40 MHz additionally ⁴ |
| | with R&S®ESW-B8 option | 20 MHz, 30 MHz, 40 MHz, 50 MHz, 80 MHz additionally ⁴ |
| Bandwidth uncertainty | RBW $\leq 10 \text{ MHz}$ | < 3 % |
| | RBW $> 10 \text{ MHz}$ | < 3 % (nom.) |
| Shape factor 60 dB:3 dB | RBW $\leq 10 \text{ MHz}$ | < 5 |
| | RBW $> 10 \text{ MHz}$ | < 5 (nom.) |

| EMI filters | | |
|--------------------------------|---------------------------|--|
| Bandwidths (-6 dB) | standard | 1 Hz, 10 Hz, 100 Hz, 200 Hz, 1 kHz, 9 kHz, 10 kHz, 100 kHz, 120 kHz, 1 MHz, 10 MHz |
| | with R&S®ESW-B8E option | 20 MHz, 30 MHz, 40 MHz additionally ⁴ |
| | with R&S®ESW-B8 option | 20 MHz, 30 MHz, 40 MHz, 50 MHz, 80 MHz additionally ⁴ |
| Bandwidth uncertainty | RBW $\leq 10 \text{ MHz}$ | < 3 % |
| | RBW $> 10 \text{ MHz}$ | < 3 % (nom.) |
| Shape factor 60 dB:6 dB | RBW $\leq 10 \text{ MHz}$ | < 4 |
| | RBW $> 10 \text{ MHz}$ | < 4 (nom.) |

| Channel filters (analyzer mode) | | |
|---------------------------------|--|---|
| Bandwidths (-3 dB) | standard (RRC = root raised cosine) | 100 Hz, 200 Hz, 300 Hz, 500 Hz 1/1.5/2/2.4/2.7/3/3.4/4/4.5/5/6/8.5/9/10/ 12.5/14/15/16/18 (RRC)/20/21/ 24.3 (RRC)/25/30/50/100/150/192/200/ 300/500 kHz 1/1.228/1.28 (RRC)/1.5/2/3/3.84 (RRC)/ 4.096 (RRC)/5/8/10 MHz |
| | with R&S®ESW-B8E option | 20 MHz, 30 MHz, 40 MHz additionally ⁴ |
| | with R&S®ESW-B8 option | 20 MHz, 30 MHz, 40 MHz, 50 MHz, 80 MHz additionally ⁴ |
| Bandwidth accuracy | | < 2 % (nom.) |
| Shape factor 60 dB:3 dB | | < 2 (nom.) |

| Video bandwidths (analyzer mode) | | |
|----------------------------------|-------------------------|---|
| | standard | 1 Hz to 10 MHz in 1/2/3/5 sequence |
| | with R&S®ESW-B8E option | 20 MHz, 30 MHz, 40 MHz additionally ⁵ |
| | with R&S®ESW-B8 option | 20 MHz, 30 MHz, 40 MHz, 50 MHz, 80 MHz additionally ⁵ |

⁴ For $f \geq 8 \text{ GHz}$ the bandwidth may be limited by the YIG preselector.

⁵ For video bandwidth settings $> 20 \text{ MHz}$, the video bandwidth filter is bypassed.

Level

| Level display (analyzer mode) | | |
|--------------------------------------|---|--|
| Display range | | displayed noise floor up to +30 dBm |
| Logarithmic level axis | | 1 dB to 200 dB, in steps of 1/2/5 |
| Linear level axis | | 10 % of reference level per level division, 10 divisions or logarithmic scaling |
| Number of traces | | 6 |
| Trace detector | | max. peak, min. peak, auto peak (normal), sample, RMS, average, quasi-peak, CISPR-average, RMS-average |
| Trace functions | | clear/write, max. hold, min. hold, average, view |
| Setting range of reference level | | -130 dBm to (-10 dBm + RF attenuation - preamplifier / LNA gain), in steps of 0.01 dB |
| Units of level axis | logarithmic level display linear level display | dBm, dB μ V, dBmV, dB μ A, dBpW μ V, mV, μ A, mA, pW, nW |

| Level display (receiver mode) | | |
|--------------------------------------|-------------------|--|
| Level display | analog | bargraph display, separately for each detector |
| | digital | numeric; 0.01 dB resolution |
| Detectors | max. 4 selectable | max. peak, min. peak, RMS, average, quasi-peak, CISPR-average, RMS-average |
| Units of level axis | | dBm, dB μ V, dBmV, dB μ A, dBpW, dBpT |
| RF spectrum | | |
| Logarithmic level axis | | 10 dB to 200 dB, in steps of 10 |
| Frequency axis | | linear or logarithmic |
| Number of traces | | 6 |
| Detectors | normal scan | max. peak, min. peak, RMS, average, quasi-peak, CISPR-average, RMS-average |
| | time domain scan | max. peak, min. peak, RMS, average, quasi-peak, CISPR-average, RMS-average |

| Amplitude probability display – CISPR APD measurement function | | |
|---|--|-------------------------------|
| Min. amplitude probability | | 10^{-7} |
| Max. acquisition time | | 120 s |
| Analysis bandwidth (-6 dB) | | 200 Hz, 9 kHz, 120 kHz, 1 MHz |

| APD multichannel measurement function (R&S®ESW-K58 option) | | |
|---|--|-----------------------------------|
| Min. amplitude probability | | 10^{-7} |
| Max. acquisition time | | 120 s |
| Analysis bandwidth (-6 dB) | | 1 Hz ≤ analysis bandwidth ≤ 1 MHz |
| Max. number of analyzed channels | standard | |
| | analysis bandwidth = 1 MHz | 21 |
| | analysis bandwidth ≤ 300 kHz | 67 |
| | with R&S®ESW-B350/-B350R/-B1000/-B1000R option | |
| | analysis bandwidth = 1 MHz | 51 |
| | analysis bandwidth ≤ 200 kHz | 255 |

| Maximum input level | | |
|--|---|-------------------|
| DC voltage | AC coupled | 50 V |
| | DC coupled | 0 V |
| CW RF power | RF attenuation = 0 dB preselection off ⁶ , preamplifier off, LNA off ⁷ | 20 dBm (= 0.1 W) |
| | preselection/preamplifier on or LNA on ⁷ | 13 dBm (= 0.02 W) |
| | RF attenuation ≥ 10 dB preselection off ⁶ , preamplifier off, LNA off ⁷ | 30 dBm (= 1 W) |
| | preselection on ⁸ , preamplifier on or LNA on ⁷ | 23 dBm (= 0.2 W) |
| Pulse spectral density | RF attenuation = 0 dB, preamplifier off, LNA off ⁷ | 97 dB μV/MHz |
| Max. pulse voltage | RF attenuation ≥ 10 dB input 1, input 2 with pulse limiter off input 2 with pulse limiter on | 150 V 450 V |
| Response threshold of built-in pulse limiter | input 2, RF attenuation ≥ 10 dB, pulse limiter on | 30 V (nom.) |
| Max. pulse energy, pulse duration $\tau = 10 \mu\text{s}$ | RF attenuation ≥ 10 dB input 1, input 2 with pulse limiter off | 1 mWs |
| | input 2 with pulse limiter on | 20 mWs |

| Intermodulation | | |
|---|---|----------------|
| 1 dB compression of input mixer (two-tone) | RF attenuation = 0 dB, preselection off ⁶ , preamplifier off, LNA off ⁷ $f_{in} \leq 3 \text{ GHz}$ | +15 dBm (nom.) |
| | $3 \text{ GHz} < f_{in} \leq 8 \text{ GHz}$ | +10 dBm (nom.) |
| | $f_{in} > 8 \text{ GHz}$ | +7 dBm (nom.) |
| | RF attenuation = 0 dB, preselection on ⁸ and preamplifier off, LNA off ⁷ $f_{in} \leq 3 \text{ GHz}$ | +10 dBm (nom.) |
| | $3 \text{ GHz} < f_{in} \leq 8 \text{ GHz}$ | +5 dBm (nom.) |
| | $f_{in} > 8 \text{ GHz}$ | +7 dBm (nom.) |
| | RF attenuation = 0 dB, preselection on ⁸ , preamplifier on, LNA off ⁷ $f_{in} \leq 3 \text{ GHz}$ | -5 dBm (nom.) |
| | $3 \text{ GHz} < f_{in} \leq 8 \text{ GHz}$ | -10 dBm (nom.) |
| | $f_{in} > 8 \text{ GHz}$ | +7 dBm (nom.) |
| | RF attenuation = 0 dB, preselection on ⁸ , preamplifier off, LNA on ⁷ $f_{in} \leq 3 \text{ GHz}$ | -18 dBm (nom.) |
| | $3 \text{ GHz} < f_{in} \leq 8 \text{ GHz}$ | -25 dBm (nom.) |
| | $f_{in} > 8 \text{ GHz}$ | -23 dBm (nom.) |
| | RF attenuation = 0 dB, preselection off ⁶ , preamplifier off, LNA on ⁷ $f_{in} \leq 3 \text{ GHz}$ | -13 dBm (nom.) |
| | $3 \text{ GHz} < f_{in} \leq 8 \text{ GHz}$ | -20 dBm (nom.) |
| | $f_{in} > 8 \text{ GHz}$ | -23 dBm (nom.) |

⁶ Preselection off is only available in analyzer mode. In receiver mode the preselection is permanently on.⁷ With R&S®ESW-B24 option only.⁸ Default setting in receiver mode.

| | | |
|-----------------------------------|--|-----------------------|
| Third order intercept point (TOI) | RF attenuation = 0 dB, level = 2×-15 dBm, $\Delta f > 5 \times$ RBW, preselection off ⁶ , preamplifier off, LNA off ⁷ | |
| | R&S®ESW8, R&S®ESW26, R&S®ESW44 | |
| | $f_{in} < 10$ MHz | 28 dBm (nom.) |
| | 10 MHz $\leq f_{in} < 1$ GHz | > 20 dBm, typ. 25 dBm |
| | 1 GHz $\leq f_{in} < 3$ GHz | > 20 dBm, typ. 25 dBm |
| | 3 GHz $\leq f_{in} < 8$ GHz | > 17 dBm, typ. 20 dBm |
| | R&S®ESW26 | |
| | 8 GHz $\leq f_{in} < 10$ GHz | > 14 dBm, typ. 17 dBm |
| | 10 GHz $\leq f_{in} < 12$ GHz | > 16 dBm, typ. 20 dBm |
| | 12 GHz $\leq f_{in} < 17$ GHz | > 18 dBm, typ. 23 dBm |
| | 17 GHz $\leq f_{in} < 19$ GHz | > 16 dBm, typ. 20 dBm |
| | 19 GHz $\leq f_{in} \leq 26.5$ GHz | > 18 dBm, typ. 23 dBm |
| | R&S®ESW44 | |
| | 8 GHz $\leq f_{in} \leq 13.6$ GHz | > 8 dBm, typ. 11 dBm |
| | 13.6 GHz $\leq f_{in} \leq 40$ GHz | > 10 dBm, typ. 15 dBm |
| | $f_{in} > 40$ GHz | 12 dBm (nom.) |
| | RF attenuation = 0 dB, level = 2×-20 dBm, $\Delta f > 5 \times$ RBW, preselection on ⁸ , preamplifier off, LNA off ⁷ | |
| | R&S®ESW8, R&S®ESW26, R&S®ESW44 | |
| | $f_{in} < 10$ MHz | 20 dBm (nom.) |
| | 10 MHz $\leq f_{in} < 1$ GHz | > 15 dBm, typ. 20 dBm |
| | 1 GHz $\leq f_{in} < 8$ GHz | > 12 dBm, typ. 15 dBm |
| | R&S®ESW26 | |
| | 8 GHz $\leq f_{in} < 10$ GHz | > 14 dBm, typ. 17 dBm |
| | 10 GHz $\leq f_{in} < 12$ GHz | > 16 dBm, typ. 20 dBm |
| | 12 GHz $\leq f_{in} < 17$ GHz | > 18 dBm, typ. 23 dBm |
| | 17 GHz $\leq f_{in} < 19$ GHz | > 16 dBm, typ. 20 dBm |
| | 19 GHz $\leq f_{in} \leq 26.5$ GHz | > 18 dBm, typ. 23 dBm |
| | R&S®ESW44 | |
| | 8 GHz $\leq f_{in} \leq 13.6$ GHz | > 8 dBm, typ. 11 dBm |
| | 13.6 GHz $\leq f_{in} \leq 40$ GHz | > 10 dBm, typ. 15 dBm |
| | $f_{in} > 40$ GHz | 12 dBm (nom.) |
| | RF attenuation = 0 dB, level = 2×-45 dBm, $\Delta f > 5 \times$ RBW, preselection on ⁸ , preamplifier on, LNA off ⁷ | |
| | $f_{in} < 30$ MHz | -10 dBm (nom.) |
| | 30 MHz $\leq f_{in} < 3$ GHz | > -8 dBm |
| | 3 GHz $\leq f_{in} < 8$ GHz | > -10 dBm |
| | 8 GHz $\leq f_{in} \leq 44$ GHz | -20 dBm (nom.) |
| | RF attenuation = 0 dB, level = 2×-55 dBm, $\Delta f > 5 \times$ RBW, preselection on ⁸ , preamplifier off, LNA on ⁷ | |
| | 10 MHz $\leq f_{in} < 1$ GHz | -15 dBm (nom.) |
| | 1 GHz $\leq f_{in} < 8$ GHz | -18 dBm (nom.) |
| | 8 GHz $\leq f_{in} \leq 26.5$ GHz | -20 dBm (nom.) |
| | RF attenuation = 0 dB, level = 2×-55 dBm, $\Delta f > 5 \times$ RBW, preselection off ⁶ , preamplifier off, LNA on ⁷ | |
| | 10 MHz $\leq f_{in} < 1$ GHz | -10 dBm (nom.) |
| | 1 GHz $\leq f_{in} < 8$ GHz | -13 dBm (nom.) |
| | 8 GHz $\leq f_{in} \leq 44$ GHz | -20 dBm (nom.) |

| | | |
|--|---|----------------------------|
| Second harmonic intercept point (SHII) | RF attenuation = 0 dB, level = -5 dBm, preselection off ⁶ , preamplifier off, LNA off ⁷ | |
| | R&S®ESW8, R&S®ESW26 | |
| | 1 MHz < f _{in} ≤ 350 MHz | > 50 dBm, typ. 62 dBm |
| | 350 MHz < f _{in} ≤ 500 MHz | > 70 dBm, typ. 80 dBm |
| | 500 MHz < f _{in} < 1.5 GHz | > 47 dBm, typ. 52 dBm |
| | 1.5 GHz ≤ f _{in} ≤ 4 GHz | > 62 dBm, typ. 70 dBm |
| | 4 GHz < f _{in} ≤ 13.5 GHz | 65 dBm (nom.) |
| | R&S®ESW44 | |
| | 1 MHz < f _{in} ≤ 500 MHz | > 45 dBm, typ. 55 dBm |
| | 500 MHz < f _{in} < 1.5 GHz | > 47 dBm, typ. 56 dBm |
| | 1.5 GHz ≤ f _{in} ≤ 4 GHz | > 62 dBm, typ. 70 dBm |
| | 4 GHz < f _{in} ≤ 22 GHz | 65 dBm (nom.) |
| | RF attenuation = 0 dB, level = -10 dBm, preselection on ⁸ , preamplifier off, LNA off ⁷ | |
| | 1 MHz < f _{in} ≤ 15 MHz | > 50 dBm (nom.) |
| | 15 MHz < f _{in} ≤ 65 MHz | > 50 dBm (nom.) |
| | 65 MHz < f _{in} ≤ 4000 MHz | > 60 dBm (nom.) |
| | 4 GHz < f _{in} ≤ 22 GHz | 65 dBm (nom.) |
| | RF attenuation = 0 dB, level = -30 dBm, preselection on ⁸ , preamplifier on, LNA off ⁷ | |
| | 1 MHz < f _{in} ≤ 15 MHz | > 20 dBm (nom.) |
| | 15 MHz < f _{in} ≤ 105 MHz | > 25 dBm (nom.) |
| | 105 MHz < f _{in} ≤ 4000 MHz | > 40 dBm (nom.) |
| | 4 GHz < f _{in} ≤ 22 GHz | 10 dBm (nom.) ⁷ |
| | RF attenuation = 0 dB, level = -55 dBm, preselection on ⁸ , preamplifier off, LNA on ⁷ | |
| | 50 MHz < f _{in} ≤ 21.75 GHz | 5 dBm (nom.) |
| | RF attenuation = 0 dB, level = -50 dBm, preselection off ⁶ , preamplifier off, LNA on ⁷ | |
| | 50 MHz < f _{in} ≤ 21.75 GHz | 10 dBm (nom.) |

Sensitivity

All noise level data in this section not marked as typical (typ.) or nominal (nom.) are specified values whose compliance is ensured by testing.

| Displayed average noise level of instruments without R&S®ESW-B24 option (analyzer mode) | |
|---|--|
| Preselection off/on ⁶ , preamplifier off | RF attenuation = 0 dB, termination = 50 Ω, normalized to 1 Hz RBW, trace average, average mode = log, sample detector, +5 °C to +40 °C |
| 1 Hz ≤ f < 2 Hz | -80 dBm (nom.) |
| 2 Hz ≤ f < 10 Hz | -100 dBm, typ. -110 dBm |
| 10 Hz ≤ f ≤ 100 Hz | -110 dBm, typ. -120 dBm |
| 100 Hz < f ≤ 1 kHz | -120 dBm, typ. -130 dBm |
| 1 kHz < f < 9 kHz | -135 dBm, typ. -147 dBm |
| RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C | |
| R&S®ESW8 | |
| 9 kHz ≤ f ≤ 1 MHz | -145 dBm, typ. -150 dBm |
| 1 MHz < f ≤ 1 GHz | -150 dBm, typ. -154 dBm |
| 1 GHz < f < 3 GHz | -152 dBm, typ. -156 dBm |
| 3 GHz ≤ f ≤ 8 GHz | -152 dBm, typ. -156 dBm |
| R&S®ESW26 | |
| 9 kHz ≤ f ≤ 1 MHz | -145 dBm, typ. -150 dBm |
| 1 MHz < f ≤ 1 GHz | -149 dBm, typ. -154 dBm |
| 1 GHz < f < 3 GHz | -151 dBm, typ. -156 dBm |
| 3 GHz ≤ f < 8 GHz | -150 dBm, typ. -155 dBm |
| 8 GHz ≤ f < 13.6 GHz | -150 dBm, typ. -155 dBm |
| 13.6 GHz ≤ f < 18 GHz | -149 dBm, typ. -153 dBm |
| 18 GHz ≤ f < 25 GHz | -147 dBm, typ. -150 dBm |
| 25 GHz ≤ f ≤ 26.5 GHz | -143 dBm, typ. -146 dBm |
| R&S®ESW44 | |
| 9 kHz ≤ f ≤ 1 MHz | -145 dBm, typ. -150 dBm |
| 1 MHz < f ≤ 1 GHz | -149 dBm, typ. -154 dBm |
| 1 GHz < f < 3 GHz | -151 dBm, typ. -156 dBm |
| 3 GHz ≤ f < 8 GHz | -150 dBm, typ. -155 dBm |
| 8 GHz ≤ f < 13.6 GHz | -150 dBm, typ. -154 dBm |
| 13.6 GHz ≤ f < 18 GHz | -149 dBm, typ. -153 dBm |
| 18 GHz ≤ f < 25 GHz | -147 dBm, typ. -151 dBm |
| 25 GHz ≤ f ≤ 34 GHz | -143 dBm, typ. -147 dBm |
| 34 GHz < f ≤ 40 GHz | -140 dBm, typ. -144 dBm |
| 40 GHz < f ≤ 44 GHz | -138 dBm, typ. -142 dBm |

| | | |
|--|--|-------------------------|
| Preselection on ⁸ , preamplifier on | RF attenuation = 0 dB, termination = 50 Ω, normalized to 1 Hz RBW, trace average, average mode = log, sample detector, +5 °C to +40 °C | |
| | 1 kHz < f < 9 kHz | -140 dBm, typ. -150 dBm |
| | RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C | |
| | R&S®ESW8 | |
| | 9 kHz ≤ f ≤ 1 MHz | -155 dBm, typ. -160 dBm |
| | 1 MHz < f ≤ 30 MHz | -162 dBm, typ. -165 dBm |
| | 30 MHz < f < 2.5 GHz | -165 dBm, typ. -168 dBm |
| | 2.5 GHz ≤ f < 4.8 GHz | -162 dBm, typ. -165 dBm |
| | 4.8 GHz ≤ f ≤ 8 GHz | -160 dBm, typ. -163 dBm |
| | R&S®ESW26 | |
| R&S®ESW44 | 9 kHz ≤ f ≤ 1 MHz | -155 dBm, typ. -160 dBm |
| | 1 MHz < f ≤ 30 MHz | -162 dBm, typ. -165 dBm |
| | 30 MHz < f < 2.5 GHz | -163 dBm, typ. -166 dBm |
| | 2.5 GHz ≤ f < 4.8 GHz | -160 dBm, typ. -163 dBm |
| | 4.8 GHz ≤ f < 8 GHz | -157 dBm, typ. -160 dBm |
| | 8 GHz ≤ f < 13.6 GHz | -150 dBm, typ. -155 dBm |
| | 13.6 GHz ≤ f < 18 GHz | -149 dBm, typ. -153 dBm |
| | 18 GHz ≤ f < 25 GHz | -147 dBm, typ. -150 dBm |
| | 25 GHz ≤ f < 26.5 GHz | -143 dBm, typ. -146 dBm |
| | 9 kHz ≤ f ≤ 1 MHz | -155 dBm, typ. -160 dBm |
| | 1 MHz < f ≤ 30 MHz | -162 dBm, typ. -165 dBm |
| | 30 MHz < f < 2.5 GHz | -163 dBm, typ. -166 dBm |
| | 2.5 GHz ≤ f < 4.8 GHz | -160 dBm, typ. -163 dBm |
| | 4.8 GHz ≤ f < 8 GHz | -157 dBm, typ. -160 dBm |
| Rohde & Schwarz R&S®ESW EMI Test Receiver | 8 GHz ≤ f < 13.6 GHz | -150 dBm, typ. -154 dBm |
| | 13.6 GHz ≤ f < 18 GHz | -149 dBm, typ. -153 dBm |
| | 18 GHz ≤ f < 25 GHz | -147 dBm, typ. -151 dBm |
| | 25 GHz ≤ f < 34 GHz | -143 dBm, typ. -147 dBm |
| | 34 GHz < f ≤ 40 GHz | -140 dBm, typ. -144 dBm |
| | 40 GHz < f ≤ 44 GHz | -138 dBm, typ. -142 dBm |

| Displayed average noise level of instruments with R&S®ESW-B24 option (analyzer mode) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|--|-----------------|----------------|------------------|-------------------------|--------------------|-------------------------|--------------------|-------------------------|-------------------|-------------------------|----------|--|-------------------|-------------------------|-------------------|-------------------------|-------------------|-------------------------|-------------------|-------------------------|-----------|--|-------------------|-------------------------|-------------------|-------------------------|-------------------|-------------------------|-------------------|-------------------------|----------------------|-------------------------|-----------------------|-------------------------|---------------------|-------------------------|-----------------------|-------------------------|-----------|--|-------------------|-------------------------|-------------------|-------------------------|-------------------|-------------------------|-------------------|-------------------------|----------------------|-------------------------|-----------------------|-------------------------|---------------------|-------------------------|---------------------|-------------------------|---------------------|-------------------------|---------------------|-------------------------|--|-------------------|-------------------------|----------|--|-------------------|-------------------------|--------------------|-------------------------|----------------------|-------------------------|-----------------------|-------------------------|---------------------|-------------------------|-----------|--|-------------------|-------------------------|--------------------|-------------------------|----------------------|-------------------------|-----------------------|-------------------------|---------------------|-------------------------|----------------------|-------------------------|-----------------------|-------------------------|-----------------------|-------------------------|-----------|--|-------------------|-------------------------|--------------------|-------------------------|----------------------|-------------------------|-----------------------|-------------------------|---------------------|-------------------------|--------------------|-------------------------|-----------------------|-------------------------|-----------------------|-------------------------|---------------------|-------------------------|---------------------|----------|
| Preselection off/on ⁶ , preamplifier off, LNA off | RF attenuation = 0 dB, termination = 50 Ω, normalized to 1 Hz RBW, trace average, average mode = log, sample detector, +5 °C to +40 °C <table> <tr><td>1 Hz ≤ f < 2 Hz</td><td>-80 dBm (nom.)</td></tr> <tr><td>2 Hz ≤ f < 10 Hz</td><td>-100 dBm, typ. -110 dBm</td></tr> <tr><td>10 Hz ≤ f ≤ 100 Hz</td><td>-110 dBm, typ. -120 dBm</td></tr> <tr><td>100 Hz < f ≤ 1 kHz</td><td>-120 dBm, typ. -130 dBm</td></tr> <tr><td>1 kHz < f < 9 kHz</td><td>-135 dBm, typ. -147 dBm</td></tr> </table> RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C <table> <tr><td>R&S®ESW8</td><td></td></tr> <tr><td>9 kHz ≤ f ≤ 1 MHz</td><td>-145 dBm, typ. -150 dBm</td></tr> <tr><td>1 MHz < f ≤ 1 GHz</td><td>-150 dBm, typ. -154 dBm</td></tr> <tr><td>1 GHz < f < 3 GHz</td><td>-152 dBm, typ. -156 dBm</td></tr> <tr><td>3 GHz ≤ f ≤ 8 GHz</td><td>-152 dBm, typ. -156 dBm</td></tr> <tr><td>R&S®ESW26</td><td></td></tr> <tr><td>9 kHz ≤ f ≤ 1 MHz</td><td>-145 dBm, typ. -150 dBm</td></tr> <tr><td>1 MHz < f ≤ 1 GHz</td><td>-149 dBm, typ. -154 dBm</td></tr> <tr><td>1 GHz < f < 3 GHz</td><td>-150 dBm, typ. -155 dBm</td></tr> <tr><td>3 GHz ≤ f < 8 GHz</td><td>-149 dBm, typ. -154 dBm</td></tr> <tr><td>8 GHz ≤ f < 13.6 GHz</td><td>-149 dBm, typ. -154 dBm</td></tr> <tr><td>13.6 GHz ≤ f < 18 GHz</td><td>-148 dBm, typ. -152 dBm</td></tr> <tr><td>18 GHz ≤ f < 25 GHz</td><td>-145 dBm, typ. -149 dBm</td></tr> <tr><td>25 GHz ≤ f ≤ 26.5 GHz</td><td>-141 dBm, typ. -145 dBm</td></tr> <tr><td>R&S®ESW44</td><td></td></tr> <tr><td>9 kHz ≤ f ≤ 1 MHz</td><td>-145 dBm, typ. -150 dBm</td></tr> <tr><td>1 MHz < f ≤ 1 GHz</td><td>-149 dBm, typ. -154 dBm</td></tr> <tr><td>1 GHz < f < 3 GHz</td><td>-150 dBm, typ. -155 dBm</td></tr> <tr><td>3 GHz ≤ f < 8 GHz</td><td>-149 dBm, typ. -154 dBm</td></tr> <tr><td>8 GHz ≤ f < 13.6 GHz</td><td>-148 dBm, typ. -152 dBm</td></tr> <tr><td>13.6 GHz ≤ f < 18 GHz</td><td>-147 dBm, typ. -151 dBm</td></tr> <tr><td>18 GHz ≤ f < 25 GHz</td><td>-145 dBm, typ. -149 dBm</td></tr> <tr><td>25 GHz ≤ f ≤ 34 GHz</td><td>-140 dBm, typ. -144 dBm</td></tr> <tr><td>34 GHz < f ≤ 40 GHz</td><td>-137 dBm, typ. -141 dBm</td></tr> <tr><td>40 GHz < f ≤ 44 GHz</td><td>-135 dBm, typ. -140 dBm</td></tr> </table> Preselection on ⁸ , preamplifier on, LNA off | 1 Hz ≤ f < 2 Hz | -80 dBm (nom.) | 2 Hz ≤ f < 10 Hz | -100 dBm, typ. -110 dBm | 10 Hz ≤ f ≤ 100 Hz | -110 dBm, typ. -120 dBm | 100 Hz < f ≤ 1 kHz | -120 dBm, typ. -130 dBm | 1 kHz < f < 9 kHz | -135 dBm, typ. -147 dBm | R&S®ESW8 | | 9 kHz ≤ f ≤ 1 MHz | -145 dBm, typ. -150 dBm | 1 MHz < f ≤ 1 GHz | -150 dBm, typ. -154 dBm | 1 GHz < f < 3 GHz | -152 dBm, typ. -156 dBm | 3 GHz ≤ f ≤ 8 GHz | -152 dBm, typ. -156 dBm | R&S®ESW26 | | 9 kHz ≤ f ≤ 1 MHz | -145 dBm, typ. -150 dBm | 1 MHz < f ≤ 1 GHz | -149 dBm, typ. -154 dBm | 1 GHz < f < 3 GHz | -150 dBm, typ. -155 dBm | 3 GHz ≤ f < 8 GHz | -149 dBm, typ. -154 dBm | 8 GHz ≤ f < 13.6 GHz | -149 dBm, typ. -154 dBm | 13.6 GHz ≤ f < 18 GHz | -148 dBm, typ. -152 dBm | 18 GHz ≤ f < 25 GHz | -145 dBm, typ. -149 dBm | 25 GHz ≤ f ≤ 26.5 GHz | -141 dBm, typ. -145 dBm | R&S®ESW44 | | 9 kHz ≤ f ≤ 1 MHz | -145 dBm, typ. -150 dBm | 1 MHz < f ≤ 1 GHz | -149 dBm, typ. -154 dBm | 1 GHz < f < 3 GHz | -150 dBm, typ. -155 dBm | 3 GHz ≤ f < 8 GHz | -149 dBm, typ. -154 dBm | 8 GHz ≤ f < 13.6 GHz | -148 dBm, typ. -152 dBm | 13.6 GHz ≤ f < 18 GHz | -147 dBm, typ. -151 dBm | 18 GHz ≤ f < 25 GHz | -145 dBm, typ. -149 dBm | 25 GHz ≤ f ≤ 34 GHz | -140 dBm, typ. -144 dBm | 34 GHz < f ≤ 40 GHz | -137 dBm, typ. -141 dBm | 40 GHz < f ≤ 44 GHz | -135 dBm, typ. -140 dBm | RF attenuation = 0 dB, termination = 50 Ω, normalized to 1 Hz RBW, trace average, average mode = log, sample detector, +5 °C to +40 °C <table> <tr><td>1 kHz < f < 9 kHz</td><td>-140 dBm, typ. -150 dBm</td></tr> </table> RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C <table> <tr><td>R&S®ESW8</td><td></td></tr> <tr><td>9 kHz ≤ f ≤ 1 MHz</td><td>-155 dBm, typ. -160 dBm</td></tr> <tr><td>1 MHz < f ≤ 30 MHz</td><td>-162 dBm, typ. -165 dBm</td></tr> <tr><td>30 MHz < f < 2.5 GHz</td><td>-165 dBm, typ. -168 dBm</td></tr> <tr><td>2.5 GHz ≤ f < 4.8 GHz</td><td>-162 dBm, typ. -165 dBm</td></tr> <tr><td>4.8 GHz ≤ f ≤ 8 GHz</td><td>-160 dBm, typ. -163 dBm</td></tr> <tr><td>R&S®ESW26</td><td></td></tr> <tr><td>9 kHz ≤ f ≤ 1 MHz</td><td>-155 dBm, typ. -160 dBm</td></tr> <tr><td>1 MHz < f ≤ 30 MHz</td><td>-161 dBm, typ. -164 dBm</td></tr> <tr><td>30 MHz < f < 2.5 GHz</td><td>-162 dBm, typ. -165 dBm</td></tr> <tr><td>2.5 GHz ≤ f < 4.8 GHz</td><td>-158 dBm, typ. -161 dBm</td></tr> <tr><td>4.8 GHz ≤ f < 8 GHz</td><td>-155 dBm, typ. -158 dBm</td></tr> <tr><td>8 GHz ≤ f ≤ 13.6 GHz</td><td>-164 dBm, typ. -168 dBm</td></tr> <tr><td>13.6 GHz < f ≤ 22 GHz</td><td>-162 dBm, typ. -166 dBm</td></tr> <tr><td>22 GHz < f ≤ 26.5 GHz</td><td>-157 dBm, typ. -161 dBm</td></tr> <tr><td>R&S®ESW44</td><td></td></tr> <tr><td>9 kHz ≤ f ≤ 1 MHz</td><td>-155 dBm, typ. -160 dBm</td></tr> <tr><td>1 MHz < f ≤ 30 MHz</td><td>-161 dBm, typ. -164 dBm</td></tr> <tr><td>30 MHz < f < 2.5 GHz</td><td>-162 dBm, typ. -165 dBm</td></tr> <tr><td>2.5 GHz ≤ f < 4.8 GHz</td><td>-158 dBm, typ. -161 dBm</td></tr> <tr><td>4.8 GHz ≤ f < 8 GHz</td><td>-155 dBm, typ. -158 dBm</td></tr> <tr><td>8 GHz ≤ f ≤ 18 GHz</td><td>-162 dBm, typ. -167 dBm</td></tr> <tr><td>18 GHz < f ≤ 26.5 GHz</td><td>-161 dBm, typ. -166 dBm</td></tr> <tr><td>26.5 GHz < f ≤ 40 GHz</td><td>-160 dBm, typ. -164 dBm</td></tr> <tr><td>40 GHz < f ≤ 43 GHz</td><td>-157 dBm, typ. -162 dBm</td></tr> <tr><td>43 GHz < f ≤ 44 GHz</td><td>-146 dBm</td></tr> </table> | 1 kHz < f < 9 kHz | -140 dBm, typ. -150 dBm | R&S®ESW8 | | 9 kHz ≤ f ≤ 1 MHz | -155 dBm, typ. -160 dBm | 1 MHz < f ≤ 30 MHz | -162 dBm, typ. -165 dBm | 30 MHz < f < 2.5 GHz | -165 dBm, typ. -168 dBm | 2.5 GHz ≤ f < 4.8 GHz | -162 dBm, typ. -165 dBm | 4.8 GHz ≤ f ≤ 8 GHz | -160 dBm, typ. -163 dBm | R&S®ESW26 | | 9 kHz ≤ f ≤ 1 MHz | -155 dBm, typ. -160 dBm | 1 MHz < f ≤ 30 MHz | -161 dBm, typ. -164 dBm | 30 MHz < f < 2.5 GHz | -162 dBm, typ. -165 dBm | 2.5 GHz ≤ f < 4.8 GHz | -158 dBm, typ. -161 dBm | 4.8 GHz ≤ f < 8 GHz | -155 dBm, typ. -158 dBm | 8 GHz ≤ f ≤ 13.6 GHz | -164 dBm, typ. -168 dBm | 13.6 GHz < f ≤ 22 GHz | -162 dBm, typ. -166 dBm | 22 GHz < f ≤ 26.5 GHz | -157 dBm, typ. -161 dBm | R&S®ESW44 | | 9 kHz ≤ f ≤ 1 MHz | -155 dBm, typ. -160 dBm | 1 MHz < f ≤ 30 MHz | -161 dBm, typ. -164 dBm | 30 MHz < f < 2.5 GHz | -162 dBm, typ. -165 dBm | 2.5 GHz ≤ f < 4.8 GHz | -158 dBm, typ. -161 dBm | 4.8 GHz ≤ f < 8 GHz | -155 dBm, typ. -158 dBm | 8 GHz ≤ f ≤ 18 GHz | -162 dBm, typ. -167 dBm | 18 GHz < f ≤ 26.5 GHz | -161 dBm, typ. -166 dBm | 26.5 GHz < f ≤ 40 GHz | -160 dBm, typ. -164 dBm | 40 GHz < f ≤ 43 GHz | -157 dBm, typ. -162 dBm | 43 GHz < f ≤ 44 GHz | -146 dBm |
| 1 Hz ≤ f < 2 Hz | -80 dBm (nom.) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 Hz ≤ f < 10 Hz | -100 dBm, typ. -110 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 10 Hz ≤ f ≤ 100 Hz | -110 dBm, typ. -120 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 100 Hz < f ≤ 1 kHz | -120 dBm, typ. -130 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 kHz < f < 9 kHz | -135 dBm, typ. -147 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| R&S®ESW8 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 9 kHz ≤ f ≤ 1 MHz | -145 dBm, typ. -150 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 MHz < f ≤ 1 GHz | -150 dBm, typ. -154 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 GHz < f < 3 GHz | -152 dBm, typ. -156 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 GHz ≤ f ≤ 8 GHz | -152 dBm, typ. -156 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| R&S®ESW26 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 9 kHz ≤ f ≤ 1 MHz | -145 dBm, typ. -150 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 MHz < f ≤ 1 GHz | -149 dBm, typ. -154 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 GHz < f < 3 GHz | -150 dBm, typ. -155 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 GHz ≤ f < 8 GHz | -149 dBm, typ. -154 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 8 GHz ≤ f < 13.6 GHz | -149 dBm, typ. -154 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 13.6 GHz ≤ f < 18 GHz | -148 dBm, typ. -152 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 18 GHz ≤ f < 25 GHz | -145 dBm, typ. -149 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 25 GHz ≤ f ≤ 26.5 GHz | -141 dBm, typ. -145 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| R&S®ESW44 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 9 kHz ≤ f ≤ 1 MHz | -145 dBm, typ. -150 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 MHz < f ≤ 1 GHz | -149 dBm, typ. -154 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 GHz < f < 3 GHz | -150 dBm, typ. -155 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 GHz ≤ f < 8 GHz | -149 dBm, typ. -154 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 8 GHz ≤ f < 13.6 GHz | -148 dBm, typ. -152 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 13.6 GHz ≤ f < 18 GHz | -147 dBm, typ. -151 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 18 GHz ≤ f < 25 GHz | -145 dBm, typ. -149 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 25 GHz ≤ f ≤ 34 GHz | -140 dBm, typ. -144 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 34 GHz < f ≤ 40 GHz | -137 dBm, typ. -141 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 40 GHz < f ≤ 44 GHz | -135 dBm, typ. -140 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 kHz < f < 9 kHz | -140 dBm, typ. -150 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| R&S®ESW8 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 9 kHz ≤ f ≤ 1 MHz | -155 dBm, typ. -160 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 MHz < f ≤ 30 MHz | -162 dBm, typ. -165 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 30 MHz < f < 2.5 GHz | -165 dBm, typ. -168 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2.5 GHz ≤ f < 4.8 GHz | -162 dBm, typ. -165 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4.8 GHz ≤ f ≤ 8 GHz | -160 dBm, typ. -163 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| R&S®ESW26 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 9 kHz ≤ f ≤ 1 MHz | -155 dBm, typ. -160 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 MHz < f ≤ 30 MHz | -161 dBm, typ. -164 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 30 MHz < f < 2.5 GHz | -162 dBm, typ. -165 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2.5 GHz ≤ f < 4.8 GHz | -158 dBm, typ. -161 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4.8 GHz ≤ f < 8 GHz | -155 dBm, typ. -158 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 8 GHz ≤ f ≤ 13.6 GHz | -164 dBm, typ. -168 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 13.6 GHz < f ≤ 22 GHz | -162 dBm, typ. -166 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 22 GHz < f ≤ 26.5 GHz | -157 dBm, typ. -161 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| R&S®ESW44 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 9 kHz ≤ f ≤ 1 MHz | -155 dBm, typ. -160 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 MHz < f ≤ 30 MHz | -161 dBm, typ. -164 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 30 MHz < f < 2.5 GHz | -162 dBm, typ. -165 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2.5 GHz ≤ f < 4.8 GHz | -158 dBm, typ. -161 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4.8 GHz ≤ f < 8 GHz | -155 dBm, typ. -158 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 8 GHz ≤ f ≤ 18 GHz | -162 dBm, typ. -167 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 18 GHz < f ≤ 26.5 GHz | -161 dBm, typ. -166 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 26.5 GHz < f ≤ 40 GHz | -160 dBm, typ. -164 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 40 GHz < f ≤ 43 GHz | -157 dBm, typ. -162 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 43 GHz < f ≤ 44 GHz | -146 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| | | |
|--|--|-------------------------|
| Preselection off/on ⁶ , preamplifier off, LNA on | RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C | |
| | R&S®ESW8 | |
| | 150 kHz < f ≤ 1 MHz | -130 dBm |
| | 1 MHz < f ≤ 5 MHz | -140 dBm |
| | 5 MHz < f ≤ 50 MHz | -150 dBm |
| | 50 MHz < f ≤ 150 MHz | -163 dBm, typ. -166 dBm |
| | 150 MHz < f ≤ 8 GHz | -166 dBm, typ. -169 dBm |
| | R&S®ESW26 | |
| | 150 kHz < f ≤ 1 MHz | -130 dBm |
| | 1 MHz < f ≤ 5 MHz | -140 dBm |
| | 5 MHz < f ≤ 50 MHz | -150 dBm |
| | 50 MHz < f ≤ 150 MHz | -163 dBm, typ. -166 dBm |
| | 150 MHz < f ≤ 8 GHz | -166 dBm, typ. -169 dBm |
| | 8 GHz < f ≤ 13.6 GHz | -164 dBm, typ. -168 dBm |
| | 13.6 GHz < f ≤ 22 GHz | -162 dBm, typ. -166 dBm |
| | 22 GHz < f ≤ 26.5 GHz | -157 dBm, typ. -161 dBm |
| | R&S®ESW44 | |
| | 150 kHz < f ≤ 1 MHz | -160 dBm, typ. -163 dBm |
| | 1 MHz < f ≤ 3 GHz | -165 dBm, typ. -169 dBm |
| | 3 GHz < f ≤ 8 GHz | -162 dBm, typ. -166 dBm |
| | 8 GHz < f ≤ 18 GHz | -162 dBm, typ. -167 dBm |
| | 18 GHz < f ≤ 26.5 GHz | -161 dBm, typ. -166 dBm |
| | 26.5 GHz < f ≤ 40 GHz | -160 dBm, typ. -164 dBm |
| | 40 GHz < f ≤ 43 GHz | -157 dBm, typ. -162 dBm |
| | 43 GHz < f ≤ 44 GHz | -146 dBm |

| Noise indication of instruments without R&S®ESW-B24 option (receiver mode) | | |
|---|---|------------|
| Nominal, calculated from displayed average noise level (DANL) data | | |
| Preamplifier = off | RF attenuation = 0 dB, termination = 50 Ω, average (AV) detector, +5 °C to +40 °C | |
| | all models | |
| | 1 Hz ≤ f < 2 Hz, BW = 1 Hz | 27 dBµV |
| | 2 Hz ≤ f < 10 Hz, BW = 1 Hz | < 7 dBµV |
| | 10 Hz ≤ f ≤ 100 Hz, BW = 10 Hz | < 7 dBµV |
| | 100 Hz < f ≤ 1 kHz, BW = 100 Hz | < 7 dBµV |
| | 1 kHz < f < 9 kHz, BW = 100 Hz | < -8 dBµV |
| R&S®ESW8 | | |
| | 9 kHz ≤ f < 150 kHz, BW = 200 Hz | < -15 dBµV |
| | 150 kHz ≤ f < 1 MHz, BW = 9 kHz | < 1 dBµV |
| | 1 MHz ≤ f < 30 MHz, BW = 9 kHz | < -4 dBµV |
| | 30 MHz ≤ f < 1 GHz, BW = 120 kHz | < 8 dBµV |
| | 1 GHz ≤ f < 3 GHz, BW = 1 MHz | < 15 dBµV |
| | 3 GHz ≤ f ≤ 8 GHz, BW = 1 MHz | < 15 dBµV |
| R&S®ESW26 | | |
| | 9 kHz ≤ f < 150 kHz, BW = 200 Hz | < -15 dBµV |
| | 150 kHz ≤ f < 1 MHz, BW = 9 kHz | < 1 dBµV |
| | 1 MHz ≤ f < 30 MHz, BW = 9 kHz | < -3 dBµV |
| | 30 MHz ≤ f < 1 GHz, BW = 120 kHz | < 9 dBµV |
| | 1 GHz ≤ f < 3 GHz, BW = 1 MHz | < 16 dBµV |
| | 3 GHz ≤ f < 8 GHz, BW = 1 MHz | < 17 dBµV |
| | 8 GHz ≤ f < 13.6 GHz, BW = 1 MHz | < 17 dBµV |
| | 13.6 GHz ≤ f < 18 GHz, BW = 1 MHz | < 18 dBµV |
| | 18 GHz ≤ f < 25 GHz, BW = 1 MHz | < 20 dBµV |
| | 25 GHz ≤ f ≤ 26.5 GHz, BW = 1 MHz | < 24 dBµV |
| R&S®ESW44 | | |
| | 9 kHz ≤ f < 150 kHz, BW = 200 Hz | < -15 dBµV |
| | 150 kHz ≤ f < 1 MHz, BW = 9 kHz | < 1 dBµV |
| | 1 MHz ≤ f < 30 MHz, BW = 9 kHz | < -3 dBµV |
| | 30 MHz ≤ f < 1 GHz, BW = 120 kHz | < 9 dBµV |
| | 1 GHz ≤ f < 3 GHz, BW = 1 MHz | < 16 dBµV |
| | 3 GHz ≤ f < 8 GHz, BW = 1 MHz | < 17 dBµV |
| | 8 GHz ≤ f < 13.6 GHz, BW = 1 MHz | < 17 dBµV |
| | 13.6 GHz ≤ f < 18 GHz, BW = 1 MHz | < 18 dBµV |
| | 18 GHz ≤ f < 25 GHz, BW = 1 MHz | < 20 dBµV |
| | 25 GHz ≤ f ≤ 34 GHz, BW = 1 MHz | < 24 dBµV |
| | 34 GHz ≤ f < 40 GHz, BW = 1 MHz | < 27 dBµV |
| | 40 GHz ≤ f ≤ 44 GHz, BW = 1 MHz | < 29 dBµV |

| Preamplifier = on | RF attenuation = 0 dB, termination = 50Ω , average (AV) detector, +5 °C to +40 °C all models | |
|-------------------|---|------------------|
| | 1 kHz ≤ f < 9 kHz, BW = 100 Hz | < -13 dB μ V |
| R&S®ESW8 | 9 kHz ≤ f < 150 kHz, BW = 200 Hz | < -25 dB μ V |
| | 150 kHz ≤ f ≤ 1 MHz, BW = 9 kHz | < -9 dB μ V |
| | 1 MHz ≤ f < 30 MHz, BW = 9 kHz | < -16 dB μ V |
| | 30 MHz ≤ f < 1 GHz, BW = 120 kHz | < -7 dB μ V |
| | 1 GHz ≤ f < 2.5 GHz, BW = 1 MHz | < 2 dB μ V |
| | 2.5 GHz ≤ f < 4.8 GHz, BW = 1 MHz | < 5 dB μ V |
| | 4.8 GHz ≤ f ≤ 8 GHz, BW = 1 MHz | < 7 dB μ V |
| R&S®ESW26 | 9 kHz ≤ f < 150 kHz, BW = 200 Hz | < -25 dB μ V |
| | 150 kHz ≤ f < 1 MHz, BW = 9 kHz | < -9 dB μ V |
| | 1 MHz ≤ f < 30 MHz, BW = 9 kHz | < -16 dB μ V |
| | 30 MHz ≤ f < 1 GHz, BW = 120 kHz | < -5 dB μ V |
| | 1 GHz ≤ f < 2.5 GHz, BW = 1 MHz | < 4 dB μ V |
| | 2.5 GHz ≤ f < 4.8 GHz, BW = 1 MHz | < 7 dB μ V |
| | 4.8 GHz ≤ f < 8 GHz, BW = 1 MHz | < 10 dB μ V |
| | 8 GHz ≤ f < 13.6 GHz, BW = 1 MHz | < 17 dB μ V |
| | 13.6 GHz ≤ f < 18 GHz, BW = 1 MHz | < 18 dB μ V |
| | 18 GHz ≤ f < 25 GHz, BW = 1 MHz | < 20 dB μ V |
| | 25 GHz ≤ f ≤ 26.5 GHz, BW = 1 MHz | < 24 dB μ V |
| R&S®ESW44 | 9 kHz ≤ f < 150 kHz, BW = 200 Hz | < -25 dB μ V |
| | 150 kHz ≤ f < 1 MHz, BW = 9 kHz | < -9 dB μ V |
| | 1 MHz ≤ f < 30 MHz, BW = 9 kHz | < -16 dB μ V |
| | 30 MHz ≤ f < 1 GHz, BW = 120 kHz | < -5 dB μ V |
| | 1 GHz ≤ f < 2.5 GHz, BW = 1 MHz | < 4 dB μ V |
| | 2.5 GHz ≤ f < 4.8 GHz, BW = 1 MHz | < 7 dB μ V |
| | 4.8 GHz ≤ f < 8 GHz, BW = 1 MHz | < 10 dB μ V |
| | 8 GHz ≤ f < 13.6 GHz, BW = 1 MHz | < 17 dB μ V |
| | 13.6 GHz ≤ f < 18 GHz, BW = 1 MHz | < 18 dB μ V |
| | 18 GHz ≤ f < 25 GHz, BW = 1 MHz | < 20 dB μ V |
| | 25 GHz ≤ f ≤ 34 GHz, BW = 1 MHz | < 24 dB μ V |
| | 34 GHz ≤ f < 40 GHz, BW = 1 MHz | < 27 dB μ V |
| | 40 GHz ≤ f ≤ 44 GHz, BW = 1 MHz | < 29 dB μ V |

| Noise indication of instruments with R&S®ESW-B24 option (receiver mode) | | |
|---|---|--|
| Nominal, calculated from DANL data | | |
| Preamplifier = off, LNA = off | RF attenuation = 0 dB, termination = 50 Ω, average (AV) detector, +5 °C to +40 °C | |
| all models | | |
| 1 Hz ≤ f < 2 Hz, BW = 1 Hz | 27 dBµV | |
| 2 Hz ≤ f < 10 Hz, BW = 1 Hz | < 7 dBµV | |
| 10 Hz ≤ f ≤ 100 Hz, BW = 10 Hz | < 7 dBµV | |
| 100 Hz < f ≤ 1 kHz, BW = 100 Hz | < 7 dBµV | |
| 1 kHz < f < 9 kHz, BW = 100 Hz | < -8 dBµV | |
| R&S®ESW8 | | |
| 9 kHz ≤ f < 150 kHz, BW = 200 Hz | < -15 dBµV | |
| 150 kHz ≤ f < 1 MHz, BW = 9 kHz | < 1 dBµV | |
| 1 MHz ≤ f < 30 MHz, BW = 9 kHz | < -4 dBµV | |
| 30 MHz ≤ f < 1 GHz, BW = 120 kHz | < 8 dBµV | |
| 1 GHz ≤ f < 3 GHz, BW = 1 MHz | < 15 dBµV | |
| 3 GHz ≤ f ≤ 8 GHz, BW = 1 MHz | < 15 dBµV | |
| R&S®ESW26 | | |
| 9 kHz ≤ f < 150 kHz, BW = 200 Hz | < -15 dBµV | |
| 150 kHz ≤ f < 1 MHz, BW = 9 kHz | < 1 dBµV | |
| 1 MHz ≤ f < 30 MHz, BW = 9 kHz | < -3 dBµV | |
| 30 MHz ≤ f < 1 GHz, BW = 120 kHz | < 9 dBµV | |
| 1 GHz ≤ f < 3 GHz, BW = 1 MHz | < 17 dBµV | |
| 3 GHz ≤ f < 8 GHz, BW = 1 MHz | < 18 dBµV | |
| 8 GHz ≤ f < 13.6 GHz, BW = 1 MHz | < 18 dBµV | |
| 13.6 GHz ≤ f < 18 GHz, BW = 1 MHz | < 19 dBµV | |
| 18 GHz ≤ f < 25 GHz, BW = 1 MHz | < 22 dBµV | |
| 25 GHz ≤ f ≤ 26.5 GHz, BW = 1 MHz | < 26 dBµV | |
| R&S®ESW44 | | |
| 9 kHz ≤ f < 150 kHz, BW = 200 Hz | < -15 dBµV | |
| 150 kHz ≤ f < 1 MHz, BW = 9 kHz | < 1 dBµV | |
| 1 MHz ≤ f < 30 MHz, BW = 9 kHz | < -3 dBµV | |
| 30 MHz ≤ f < 1 GHz, BW = 120 kHz | < 9 dBµV | |
| 1 GHz ≤ f < 3 GHz, BW = 1 MHz | < 17 dBµV | |
| 3 GHz ≤ f < 8 GHz, BW = 1 MHz | < 18 dBµV | |
| 8 GHz ≤ f < 13.6 GHz, BW = 1 MHz | < 19 dBµV | |
| 13.6 GHz ≤ f < 18 GHz, BW = 1 MHz | < 20 dBµV | |
| 18 GHz ≤ f < 25 GHz, BW = 1 MHz | < 22 dBµV | |
| 25 GHz ≤ f ≤ 34 GHz, BW = 1 MHz | < 27 dBµV | |
| 34 GHz ≤ f < 40 GHz, BW = 1 MHz | < 30 dBµV | |
| 40 GHz ≤ f ≤ 44 GHz, BW = 1 MHz | < 32 dBµV | |

| Preamplifier = on, LNA = off | RF attenuation = 0 dB, termination = 50Ω , average (AV) detector, +5 °C to +40 °C all models |
|------------------------------|---|
| R&S®ESW8 | 1 kHz ≤ f < 9 kHz, BW = 100 Hz < -13 dB μ V |
| | 9 kHz ≤ f < 150 kHz, BW = 200 Hz < -25 dB μ V |
| | 150 kHz ≤ f ≤ 1 MHz, BW = 9 kHz < -9 dB μ V |
| | 1 MHz ≤ f < 30 MHz, BW = 9 kHz < -16 dB μ V |
| | 30 MHz ≤ f < 1 GHz, BW = 120 kHz < -7 dB μ V |
| | 1 GHz ≤ f < 2.5 GHz, BW = 1 MHz < 2 dB μ V |
| | 2.5 GHz ≤ f < 4.8 GHz, BW = 1 MHz < 5 dB μ V |
| | 4.8 GHz ≤ f ≤ 8 GHz, BW = 1 MHz < 7 dB μ V |
| R&S®ESW26 | 9 kHz ≤ f < 150 kHz, BW = 200 Hz < -25 dB μ V |
| | 150 kHz ≤ f < 1 MHz, BW = 9 kHz < -9 dB μ V |
| | 1 MHz ≤ f < 30 MHz, BW = 9 kHz < -15 dB μ V |
| | 30 MHz ≤ f < 1 GHz, BW = 120 kHz < -4 dB μ V |
| | 1 GHz ≤ f < 2.5 GHz, BW = 1 MHz < 5 dB μ V |
| | 2.5 GHz ≤ f < 4.8 GHz, BW = 1 MHz < 9 dB μ V |
| | 4.8 GHz ≤ f < 8 GHz, BW = 1 MHz < 12 dB μ V |
| | 8 GHz ≤ f ≤ 13.6 GHz, BW = 1 MHz < 3 dB μ V |
| | 13.6 GHz < f ≤ 22 GHz, BW = 1 MHz < 5 dB μ V |
| | 22 GHz < f ≤ 26.5 GHz, BW = 1 MHz < 10 dB μ V |
| R&S®ESW44 | 9 kHz ≤ f < 150 kHz, BW = 200 Hz < -25 dB μ V |
| | 150 kHz ≤ f < 1 MHz, BW = 9 kHz < -9 dB μ V |
| | 1 MHz ≤ f < 30 MHz, BW = 9 kHz < -15 dB μ V |
| | 30 MHz ≤ f < 1 GHz, BW = 120 kHz < -4 dB μ V |
| | 1 GHz ≤ f < 2.5 GHz, BW = 1 MHz < 5 dB μ V |
| | 2.5 GHz ≤ f < 4.8 GHz, BW = 1 MHz < 9 dB μ V |
| | 4.8 GHz ≤ f < 8 GHz, BW = 1 MHz < 12 dB μ V |
| | 8 GHz ≤ f ≤ 18 GHz, BW = 1 MHz < 5 dB μ V |
| | 18 GHz < f ≤ 26.5 GHz, BW = 1 MHz < 6 dB μ V |
| | 26.5 GHz < f ≤ 40 GHz, BW = 1 MHz < 7 dB μ V |
| | 40 GHz < f ≤ 43 GHz, BW = 1 MHz < 10 dB μ V |
| | 43 GHz < f ≤ 44 GHz, BW = 1 MHz < 21 dB μ V |

| | | |
|------------------------------------|---|--|
| Preamplifier = off, LNA = on | RF attenuation = 0 dB, termination = 50 Ω, average (AV) detector, +5 °C to +40 °C | |
| R&S®ESW8 | | |
| 150 kHz ≤ f ≤ 1 MHz, BW = 9 kHz | < 16 dBµV | |
| 1 MHz < f ≤ 5 MHz, BW = 9 kHz | < 6 dBµV | |
| 5 MHz < f < 30 MHz, BW = 9 kHz | < -4 dBµV | |
| 30 MHz ≤ f ≤ 50 MHz, BW = 120 kHz | < 7 dBµV | |
| 50 MHz < f ≤ 150 MHz, BW = 120 kHz | < -5 dBµV | |
| 150 MHz < f < 1 GHz, BW = 120 kHz | < -8 dBµV | |
| 1 GHz ≤ f ≤ 8 GHz, BW = 1 MHz | < 1 dBµV | |
| R&S®ESW26 | | |
| 150 kHz ≤ f ≤ 1 MHz, BW = 9 kHz | < 16 dBµV | |
| 1 MHz < f ≤ 5 MHz, BW = 9 kHz | < 6 dBµV | |
| 5 MHz < f < 30 MHz, BW = 9 kHz | < -4 dBµV | |
| 30 MHz ≤ f ≤ 50 MHz, BW = 120 kHz | < 7 dBµV | |
| 50 MHz < f ≤ 150 MHz, BW = 120 kHz | < -5 dBµV | |
| 150 MHz < f < 1 GHz, BW = 120 kHz | < -8 dBµV | |
| 1 GHz ≤ f ≤ 8 GHz, BW = 1 MHz | < 1 dBµV | |
| 8 GHz < f ≤ 13.6 GHz, BW = 1 MHz | < 3 dBµV | |
| 13.6 GHz < f ≤ 22 GHz, BW = 1 MHz | < 5 dBµV | |
| 22 GHz < f ≤ 26.5 GHz, BW = 1 MHz | < 10 dBµV | |
| R&S®ESW44 | | |
| 150 kHz ≤ f ≤ 1 MHz, BW = 9 kHz | < -14 dBµV | |
| 1 MHz < f < 30 MHz, BW = 9 kHz | < -19 dBµV | |
| 30 MHz ≤ f < 1 GHz, BW = 120 kHz | < -7 dBµV | |
| 1 GHz ≤ f ≤ 3 GHz, BW = 1 MHz | < 2 dBµV | |
| 3 GHz < f ≤ 8 GHz, BW = 1 MHz | < 5 dBµV | |
| 8 GHz < f ≤ 18 GHz, BW = 1 MHz | < 5 dBµV | |
| 18 GHz < f ≤ 26.5 GHz, BW = 1 MHz | < 6 dBµV | |
| 26.5 GHz < f ≤ 40 GHz, BW = 1 MHz | < 7 dBµV | |
| 40 GHz < f ≤ 43 GHz, BW = 1 MHz | < 10 dBµV | |
| 43 GHz < f ≤ 44 GHz, BW = 1 MHz | < 21 dBµV | |

Spurious responses

| | | |
|--|--|--|
| Spurious responses | mixer level $\leq -10 \text{ dBm}$ ⁹ , sweep optimization: auto or dynamic | |
| Image response | $f_{in} - 2 \times 8997 \text{ MHz}$ (1st IF) | < -90 dBc |
| | $f_{in} - 2 \times 1317 \text{ MHz}$ (2nd IF) | < -90 dBc |
| | $f_{in} - 2 \times 37 \text{ MHz}$ (3rd IF) | < -90 dBc |
| | f_{in} = external interfering signal frequency | |
| Intermediate frequency response | f_{in} = 1st IF (8997 MHz) | < -90 dBc |
| | f_{in} = 2nd IF (1317 MHz) | < -90 dBc |
| | f_{in} = 3rd IF (37 MHz) | < -90 dBc |
| | f_{in} = external interfering signal frequency | |
| Residual spurious response | RF attenuation = 0 dB | |
| | $f \leq 1 \text{ MHz}$ | < -90 dBm |
| | $1 \text{ MHz} < f \leq 8900 \text{ MHz}$ | < -110 dBm |
| | $8900 \text{ MHz} < f \leq 26.5 \text{ GHz}$ | < -100 dBm |
| | $26.5 \text{ GHz} < f \leq 44 \text{ GHz}$ | < -100 dBm |
| f = receive frequency | | |
| Local oscillator related spurious | $f_{in} < 1 \text{ GHz}$ | |
| | $10 \text{ Hz} \leq \text{offset from carrier} < 200 \text{ Hz}$ | < -90 dBc |
| | offset from carrier > 200 Hz | < -100 dBc |
| | $f_{in} \geq 1 \text{ GHz}$ | |
| $10 \text{ Hz} \leq \text{offset from carrier} < 200 \text{ Hz}$ | | < -90 dBc + 20 \log(f_{in}/\text{GHz}) |
| offset from carrier > 200 Hz | | < -100 dBc + 20 \log(f_{in}/\text{GHz}) |
| Vibrational environmental stimuli | max. 0.21 g (RMS) | < -60 dBc + 20 \log(f_{in}/\text{GHz}) (\text{nom.}) |

⁹ Mixer level = signal level – RF attenuation + preamplifier / LNA gain.

Level measurement uncertainty

| | | | |
|--|---|--|--------------------------------|
| Absolute level uncertainty at 64 MHz | RBW = 10 kHz, level = -10 dBm, reference level = -10 dBm, RF attenuation = 10 dB preselection off ⁶ , +20 °C to +30 °C preselection on or off ⁶ , +15 °C to +40 °C | < 0.2 dB ($\sigma = 0.07$ dB) < 0.35 dB ($\sigma = 0.12$ dB) | |
| Frequency response, referenced to 64 MHz, preselection off ⁶ | RF attenuation = 10 dB, 20 dB, 30 dB, 40 dB, LNA off ⁷ , +20 °C to +30 °C 1 Hz ≤ f < 2 Hz 2 Hz ≤ f < 9 kHz 9 kHz ≤ f < 10 MHz 10 MHz ≤ f < 3.6 GHz 3.6 GHz ≤ f ≤ 8 GHz 8 GHz < f < 22 GHz, span < 1 GHz 22 GHz ≤ f ≤ 26.5 GHz, span < 1 GHz 26.5 GHz < f ≤ 44 GHz, span < 1 GHz any RF attenuation, LNA off ⁷ , +15 °C to +40 °C 1 Hz ≤ f < 2 Hz 2 Hz ≤ f < 9 kHz 9 kHz ≤ f < 3.6 GHz 3.6 GHz ≤ f ≤ 8 GHz 8 GHz < f < 22 GHz, span < 1 GHz 22 GHz ≤ f ≤ 26.5 GHz, span < 1 GHz 26.5 GHz < f ≤ 44 GHz, span < 1 GHz RF attenuation ≤ 20 dB, LNA on ⁷ , +20 °C to +30 °C 150 kHz ≤ f < 10 MHz 10 MHz ≤ f < 3.6 GHz 3.6 GHz ≤ f ≤ 8 GHz 8 GHz < f < 22 GHz, span < 1 GHz 22 GHz ≤ f ≤ 26.5 GHz, span < 1 GHz 26.5 GHz < f ≤ 44 GHz, span < 1 GHz | < 2 dB ($\sigma = 0.67$ dB) < 1 dB ($\sigma = 0.33$ dB) < 0.45 dB ($\sigma = 0.17$ dB) < 0.3 dB ($\sigma = 0.10$ dB) < 0.5 dB ($\sigma = 0.17$ dB) < 1.5 dB ($\sigma = 0.50$ dB) < 2 dB ($\sigma = 0.67$ dB) < 2.5 dB ($\sigma = 0.83$ dB) < 2 dB ($\sigma = 0.67$ dB) < 1 dB ($\sigma = 0.33$ dB) < 0.6 dB ($\sigma = 0.20$ dB) < 0.8 dB ($\sigma = 0.27$ dB) < 2 dB ($\sigma = 0.67$ dB) < 2.5 dB ($\sigma = 0.83$ dB) < 3 dB ($\sigma = 1.0$ dB) < 2 dB ($\sigma = 0.67$ dB) < 0.6 dB ($\sigma = 0.2$ dB) < 0.8 dB ($\sigma = 0.27$ dB) < 2 dB ($\sigma = 0.67$ dB) < 2.5 dB ($\sigma = 0.83$ dB) < 2.8 dB ($\sigma = 0.93$ dB) | |
| Frequency response, referenced to 64 MHz, preselection on ⁸ | RF attenuation = 10 dB, 20 dB, 30 dB, 40 dB, preamplifier and LNA off ⁷ , +20 °C to +30 °C 1 Hz ≤ f < 2 Hz 2 Hz ≤ f < 9 kHz 9 kHz ≤ f < 10 MHz 10 MHz ≤ f < 3.6 GHz 3.6 GHz ≤ f ≤ 8 GHz 8 GHz < f < 22 GHz, span < 1 GHz 22 GHz ≤ f ≤ 26.5 GHz, span < 1 GHz 26.5 GHz < f ≤ 44 GHz, span < 1 GHz any RF attenuation, preamplifier and LNA off ⁷ , +15 °C to +40 °C 1 Hz ≤ f < 2 Hz 2 Hz ≤ f < 9 kHz 9 kHz ≤ f < 3.6 GHz 3.6 GHz ≤ f ≤ 8 GHz 8 GHz < f < 22 GHz, span < 1 GHz 22 GHz ≤ f ≤ 26.5 GHz, span < 1 GHz 26.5 GHz < f ≤ 44 GHz, span < 1 GHz RF attenuation = 10 dB, 20 dB, 30 dB, 40 dB, preamplifier on, LNA off ⁷ , +20 °C to +30 °C 1 kHz ≤ f < 10 MHz 10 MHz ≤ f < 3.6 GHz 3.6 GHz ≤ f ≤ 8 GHz 8 GHz < f < 13.6 GHz, span < 1 GHz 13.6 GHz ≤ f ≤ 26.5 GHz, span < 1 GHz 26.5 GHz < f ≤ 44 GHz, span < 1 GHz RF attenuation ≤ 20 dB, preamplifier off, LNA on ⁷ , +20 °C to +30 °C 150 kHz ≤ f < 10 MHz 10 MHz ≤ f < 3.6 GHz 3.6 GHz ≤ f ≤ 8 GHz 8 GHz < f < 13.6 GHz, span < 1 GHz 13.6 GHz ≤ f ≤ 26.5 GHz, span < 1 GHz 26.5 GHz < f ≤ 44 GHz, span < 1 GHz Attenuator switching uncertainty | < 2 dB ($\sigma = 0.67$ dB) < 1 dB ($\sigma = 0.33$ dB) < 0.65 dB ($\sigma = 0.22$ dB) < 0.5 dB ($\sigma = 0.17$ dB) < 0.7 dB ($\sigma = 0.23$ dB) < 1.5 dB ($\sigma = 0.50$ dB) < 2 dB ($\sigma = 0.67$ dB) < 2.5 dB ($\sigma = 0.83$ dB) < 2.8 dB ($\sigma = 0.93$ dB) < 2 dB ($\sigma = 0.67$ dB) < 0.8 dB ($\sigma = 0.27$ dB) < 1.2 dB ($\sigma = 0.4$ dB) < 2 dB ($\sigma = 0.67$ dB) < 2.5 dB ($\sigma = 0.83$ dB) < 3 dB ($\sigma = 1.0$ dB) < 1 dB ($\sigma = 0.33$ dB) < 0.8 dB ($\sigma = 0.27$ dB) < 1.2 dB ($\sigma = 0.4$ dB) < 1.5 dB ($\sigma = 0.50$ dB) < 2 dB ($\sigma = 0.67$ dB) < 2.8 dB ($\sigma = 0.93$ dB) < 1 dB ($\sigma = 0.33$ dB) < 0.8 dB ($\sigma = 0.27$ dB) < 1.2 dB ($\sigma = 0.4$ dB) < 1.5 dB ($\sigma = 0.50$ dB) < 2 dB ($\sigma = 0.67$ dB) < 2.8 dB ($\sigma = 0.93$ dB) $f = 64$ MHz, 0 dB to 70 dB, referenced to 10 dB attenuation | < 0.2 dB ($\sigma = 0.07$ dB) |

| | | |
|--|----------------------------------|--------------------------------|
| Uncertainty of reference level setting | input mixer level ≤ -15 dBm | 0 dB ¹⁰ |
| | input mixer level > -15 dBm | < 0.1 dB (nom.) |
| Bandwidth switching uncertainty | referenced to RBW = 10 kHz | < 0.1 dB ($\sigma = 0.04$ dB) |

| Nonlinearity of displayed level | | |
|--|--|---------------------------------|
| Logarithmic level display | S/N > 16 dB, 0 dB \leq level ≤ -70 dB | < 0.1 dB ($\sigma = 0.04$ dB) |
| | S/N > 16 dB, -70 dB < level ≤ -90 dB | < 0.2 dB ($\sigma = 0.08$ dB) |
| Linear level display | S/N > 16 dB, 0 dB to -70 dB | < 5 % of reference level (nom.) |

| CISPR detectors | | |
|---|--|--|
| Max. peak, quasi-peak, CISPR-average, RMS-average | receiver mode or analyzer mode with preselection on, span = 0 Hz | level measurement uncertainty in line with CISPR 16-1-1:2019 |

| Total measurement uncertainty | | |
|--------------------------------------|--|---------------|
| Preselection off ⁶ | signal level = 0 dB to -70 dB below reference level, S/N > 20 dB, sweep time = auto, RF attenuation = 10 dB, 20 dB, 30 dB, 40 dB, LNA off ⁷ , span / RBW < 100, 95 % confidence level, +20 °C to +30 °C | |
| | 9 kHz \leq f \leq 10 MHz | ± 0.37 dB |
| | 10 MHz < f \leq 3.6 GHz | ± 0.27 dB |
| | 3.6 GHz < f \leq 8 GHz | ± 0.37 dB |
| | 8 GHz < f \leq 22 GHz | ± 1 dB |
| | 22 GHz < f \leq 26.5 GHz | ± 1.33 dB |
| | 26.5 GHz < f \leq 44 GHz | ± 1.65 dB |
| Preselection on ⁸ | signal level = 0 dB to -70 dB below reference level, S/N > 20 dB, sweep time = auto, RF attenuation = 10 dB, 20 dB, 30 dB, 40 dB, preamplifier off, LNA off ⁷ , span / RBW < 100, 95 % confidence level, +20 °C to +30 °C | |
| | 9 kHz \leq f \leq 10 MHz | ± 0.51 dB |
| | 10 MHz < f \leq 3.6 GHz | ± 0.43 dB |
| | 3.6 GHz < f \leq 8 GHz | ± 0.54 dB |
| | 8 GHz < f \leq 22 GHz | ± 1 dB |
| | 22 GHz < f \leq 26.5 GHz | ± 1.33 dB |
| | 26.5 GHz < f \leq 44 GHz | ± 1.65 dB |
| | signal level = 0 dB to -70 dB below reference level, S/N > 20 dB, sweep time = auto, RF attenuation = 10 dB, 20 dB, preamplifier on or LNA on ⁷ , span / RBW < 100, 95 % confidence level, +20 °C to +30 °C | |
| | 150 kHz \leq f \leq 10 MHz | ± 0.71 dB |
| | 10 MHz < f \leq 3.6 GHz | ± 0.59 dB |
| | 3.6 GHz < f \leq 8 GHz | ± 0.83 dB |
| | 8 GHz < f \leq 13.6 GHz | ± 1 dB |
| | 13.6 GHz < f \leq 26.5 GHz | ± 1.33 dB |
| | 26.5 GHz < f \leq 44 GHz | ± 1.84 dB |

¹⁰ The reference level setting affects only the graphical representation of the measurement result on the display, not the measurement itself.
The reference level setting causes no additional uncertainty in measurement results.

R&S®ESW-B350/-B350R/-B1000/-B1000R time domain scan options

Specifications in this section are valid for time domain scan with TDS optimization mode “max speed”, for instruments equipped with one of the following options: R&S®ESW-B350, R&S®ESW-B350R, R&S®ESW-B1000, R&S®ESW-B1000R.

Level

| | | |
|---------------------------------------|---|----------------|
| Third-order intercept point (TOI) | RF attenuation = 0 dB, level = 2×-10 dBm, $\Delta f > 5 \times RBW$, preamplifier off 30 MHz $\leq f_{in} \leq 1$ GHz | 18 dBm (nom.) |
| | RF attenuation = 0 dB, level = 2×-25 dBm, $\Delta f > 5 \times RBW$, preamplifier on 30 MHz $\leq f_{in} \leq 1$ GHz | 5 dBm (nom.) |
| | RF attenuation = 0 dB, level = 2×-45 dBm, $\Delta f > 5 \times RBW$, LNA on ⁷ 30 MHz $\leq f_{in} \leq 1$ GHz | -15 dBm (nom.) |
| | RF attenuation = 0 dB, level = 2×-45 dBm, $\Delta f > 5 \times RBW$, LNA on ⁷ 30 MHz $\leq f_{in} \leq 1$ GHz | -15 dBm (nom.) |
| Second harmonic intercept point (SHI) | RF attenuation = 0 dB, level = -10 dBm, preamplifier off 15 MHz $< f_{in} \leq 110$ MHz | 45 dBm (nom.) |
| | 110 MHz $< f_{in} \leq 500$ MHz | 55 dBm (nom.) |
| | RF attenuation = 0 dB, level = -30 dBm, preamplifier on 15 MHz $< f_{in} \leq 110$ MHz | 20 dBm (nom.) |
| | 110 MHz $< f_{in} \leq 500$ MHz | 30 dBm (nom.) |
| | RF attenuation = 0 dB, level = -55 dBm, LNA on ⁷ 15 MHz $< f_{in} \leq 110$ MHz | -6 dBm (nom.) |
| | 110 MHz $< f_{in} \leq 500$ MHz | 6 dBm (nom.) |
| | | |
| | | |

Sensitivity

All noise level data in this section not marked as typical (typ.) or nominal (nom.) are specified values whose compliance is ensured by testing.

| Noise indication of instruments without R&S®ESW-B24 option (receiver mode) | | |
|--|--|---------------------------------|
| Preamplifier = off | RF attenuation = 0 dB, termination = 50 Ω, average (AV) detector, +5 °C to +40 °C all models 30 MHz $\leq f < 1$ GHz, BW = 120 kHz | < 9 dBμV |
| | R&S®ESW8 1 GHz $\leq f < 3$ GHz, BW = 1 MHz | < 15 dBμV |
| | 3 GHz $\leq f \leq 8$ GHz, BW = 1 MHz | < 15 dBμV |
| | R&S®ESW26, R&S®ESW44 1 GHz $\leq f < 3$ GHz, BW = 1 MHz | < 16 dBμV |
| | 3 GHz $\leq f < 8$ GHz, BW = 1 MHz | < 17 dBμV |
| | f ≥ 8 GHz, BW = 1 MHz | see specifications of base unit |
| Preamplifier = on | RF attenuation = 0 dB, termination = 50 Ω, average (AV) detector, +5 °C to +40 °C all models 30 MHz $\leq f < 1$ GHz, BW = 120 kHz | < -2 dBμV |
| | R&S®ESW8 1 GHz $\leq f < 2.5$ GHz, BW = 1 MHz | < 2 dBμV |
| | 2.5 GHz $\leq f < 4.8$ GHz, BW = 1 MHz | < 5 dBμV |
| | 4.8 GHz $\leq f \leq 8$ GHz, BW = 1 MHz | < 7 dBμV |
| | R&S®ESW26, R&S®ESW44 1 GHz $\leq f < 2.5$ GHz, BW = 1 MHz | < 4 dBμV |
| | 2.5 GHz $\leq f < 4.8$ GHz, BW = 1 MHz | < 7 dBμV |
| | 4.8 GHz $\leq f < 8$ GHz, BW = 1 MHz | < 10 dBμV |
| | f ≥ 8 GHz, BW = 1 MHz | see specifications of base unit |
| Noise indication of instruments with R&S®ESW-B24 option (receiver mode) | | |
| Preamplifier = off, LNA = off | RF attenuation = 0 dB, termination = 50 Ω, average (AV) detector, +5 °C to +40 °C all models 30 MHz $\leq f < 1$ GHz, BW = 120 kHz | < 9 dBμV |
| | R&S®ESW8 1 GHz $\leq f < 3$ GHz, BW = 1 MHz | < 15 dBμV |
| | 3 GHz $\leq f \leq 8$ GHz, BW = 1 MHz | < 15 dBμV |
| | R&S®ESW26, R&S®ESW44 1 GHz $\leq f < 3$ GHz, BW = 1 MHz | < 17 dBμV |
| | 3 GHz $\leq f < 8$ GHz, BW = 1 MHz | < 18 dBμV |
| | f ≥ 8 GHz, BW = 1 MHz | see specifications of base unit |

| | | |
|------------------------------|---|---------------------------------|
| Preamplifier = on, LNA = off | RF attenuation = 0 dB, termination = 50 Ω, average (AV) detector, +5 °C to +40 °C all models | |
| | 30 MHz ≤ f < 1 GHz, BW = 120 kHz | < -4 dBμV |
| | R&S®ESW8 | |
| | 1 GHz ≤ f < 2.5 GHz, BW = 1 MHz | < 2 dBμV |
| | 2.5 GHz ≤ f < 4.8 GHz, BW = 1 MHz | < 5 dBμV |
| | 4.8 GHz ≤ f ≤ 8 GHz, BW = 1 MHz | < 7 dBμV |
| | R&S®ESW26, R&S®ESW44 | |
| | 1 GHz ≤ f < 2.5 GHz, BW = 1 MHz | < 5 dBμV |
| | 2.5 GHz ≤ f < 4.8 GHz, BW = 1 MHz | < 9 dBμV |
| | 4.8 GHz ≤ f < 8 GHz, BW = 1 MHz | < 12 dBμV |
| Preamplifier = off, LNA = on | f ≥ 8 GHz, BW = 1 MHz | see specifications of base unit |
| | RF attenuation = 0 dB, termination = 50 Ω, average (AV) detector, +5 °C to +40 °C all models | |
| | 30 MHz ≤ f < 1 GHz, BW = 120 kHz | < -10 dBμV |
| | R&S®ESW8 | |
| | 1 GHz ≤ f ≤ 8 GHz, BW = 1 MHz | < 1 dBμV |
| | R&S®ESW26 | |
| | 1 GHz ≤ f ≤ 8 GHz, BW = 1 MHz | < 1 dBμV |
| | f ≥ 8 GHz, BW = 1 MHz | see specifications of base unit |
| | R&S®ESW44 | |
| | 1 GHz ≤ f ≤ 3 GHz, BW = 1 MHz | < 3 dBμV |
| | 3 GHz < f ≤ 8 GHz, BW = 1 MHz | < 7 dBμV |
| | f ≥ 8 GHz, BW = 1 MHz | see specifications of base unit |

Spurious responses

| | | |
|----------------------------|--|-----------------|
| Residual spurious response | RF attenuation = 0 dB | |
| | 30 MHz ≤ f ≤ 1 GHz | -103 dBm (nom.) |
| | 375 MHz, 400 MHz | -90 dBm (nom.) |
| | 750 MHz | -77 dBm (nom.) |
| | 1 GHz < f ≤ 8 GHz | -90 dBm (nom.) |
| ADC related spurious | RF attenuation = 0 dB | |
| | 30 MHz ≤ f ≤ 1 GHz, input level = -10 dBm | -70 dBc (nom.) |

Level measurement uncertainty

| | | |
|--|--|---|
| Frequency response, referenced to 64 MHz | RF attenuation = 10 dB, 20 dB, 30 dB, 40 dB, preamplifier off, +20 °C to +30 °C | |
| | 30 MHz ≤ f < 1 GHz | < 0.5 dB ($\sigma = 0.17$ dB) |
| | 1 GHz ≤ f ≤ 8 GHz | < 0.7 dB ($\sigma = 0.27$ dB) |
| | RF attenuation = 10 dB, 20 dB, 30 dB, 40 dB, preamplifier on, +20 °C to +30 °C | |
| | 30 MHz ≤ f < 1 GHz | < 0.8 dB ($\sigma = 0.27$ dB) |
| | 1 GHz ≤ f ≤ 8 GHz | < 0.8 dB ($\sigma = 0.27$ dB) |
| | any RF attenuation, preamplifier on/off, +15 °C to +40 °C | |
| | 30 MHz ≤ f < 1 GHz | < 0.8 dB ($\sigma = 0.27$ dB) |
| | 1 GHz ≤ f ≤ 8 GHz | < 1.2 dB ($\sigma = 0.4$ dB) |
| | RF attenuation ≤ 20 dB, LNA on ⁷ , +20 °C to +30 °C | |
| Nonlinearity of displayed level, logarithmic level display at 128 MHz | 30 MHz ≤ f < 1 GHz | < 0.8 dB ($\sigma = 0.27$ dB) |
| | 1 GHz ≤ f ≤ 8 GHz | < 1.2 dB ($\sigma = 0.4$ dB) |
| | S/N > 16 dB, 0 dB ≤ level ≤ -60 dB | < 0.1 dB (nom.) |
| CISPR detectors | max. peak, quasi-peak, CISPR-average, RMS-average | level measurement uncertainty in line with CISPR 16-1-1:2019, quasi-peak PRF ≥ 5 Hz |

| | | |
|-------------------------------|---|---------------------------------|
| Total measurement uncertainty | signal level = 0 dB to -60 dB below reference level, S/N > 20 dB, RF attenuation = 10 dB, 20 dB, 30 dB, 40 dB, preamplifier off, LNA off ⁷ , 95 % confidence level, +20 °C to +30 °C | |
| | 30 MHz ≤ f < 1 GHz | ±0.47 dB |
| | 1 GHz ≤ f ≤ 8 GHz | ±0.57 dB |
| | signal level = 0 dB to -60 dB below reference level, S/N > 20 dB, RF attenuation = 10 dB, 20 dB, preamplifier on, 95 % confidence level, +20 °C to +30 °C | |
| | 30 MHz ≤ f < 1 GHz | ±0.62 dB |
| | 1 GHz ≤ f ≤ 8 GHz | ±0.62 dB |
| | signal level = 0 dB to -60 dB below reference level, S/N > 20 dB, RF attenuation = 10 dB, 20 dB, LNA on ⁷ , 95 % confidence level, +20 °C to +30 °C | |
| | 30 MHz ≤ f < 1 GHz | ±0.62 dB |
| | 1 GHz ≤ f ≤ 8 GHz | ±0.85 dB |
| | f > 8 GHz | see specifications of base unit |

Time domain scan (TDS)

| Maximum frequency segment processed in parallel | | |
|---|--------------------------------|----------------------------------|
| TDS optimization: max speed, any detector, standard | RBW = 200 Hz | 1.31 MHz |
| | f < 8 GHz | |
| | RBW = 9 kHz | 60 MHz |
| | RBW = 120 kHz | 49.2 MHz |
| | RBW = 1 MHz | 51.2 MHz |
| | 8 GHz ≤ f < 18.5 GHz | |
| | RBW ≥ 9 kHz | 20 MHz |
| | f ≥ 18.5 GHz | |
| | RBW ≥ 9 kHz | 30 MHz |
| TDS optimization: max speed, any detector, with R&S®ESW-B350/-B350R | RBW = 200 Hz | 1.31 MHz |
| | 30 MHz ≤ f < 8 GHz | |
| | RBW = 9 kHz | 90 MHz |
| | RBW = 120 kHz, 1 MHz | 350 MHz |
| | 1 GHz ≤ f < 8 GHz | |
| | RBW = 9 kHz | 90 MHz |
| | RBW = 120 kHz, 1 MHz | 350 MHz |
| | 8 GHz ≤ f < 18.5 GHz | |
| | RBW ≥ 9 kHz | 20 MHz |
| | f ≥ 18.5 GHz | |
| | RBW ≥ 9 kHz | 30 MHz |
| TDS optimization: max speed, any detector, with R&S®ESW-B1000/-B1000R | RBW = 200 Hz | 1.31 MHz |
| | 30 MHz ≤ f < 1000 MHz | |
| | RBW = 9 kHz | 90 MHz |
| | RBW = 120 kHz | 970 MHz |
| | RBW = 1 MHz | 880 MHz |
| | 1 GHz ≤ f < 8 GHz | |
| | RBW = 9 kHz | 90 MHz |
| | RBW = 120 kHz, 1 MHz | 450 MHz |
| | 8 GHz ≤ f < 18.5 GHz | |
| | RBW ≥ 9 kHz | 20 MHz |
| | f ≥ 18.5 GHz | |
| | RBW ≥ 9 kHz | 30 MHz |
| TDS optimization: dynamic, any detector | RBW = 200 Hz | 0.66 MHz |
| | RBW = 9 kHz | 30 MHz |
| | RBW = 120 kHz | 24.6 MHz |
| | RBW = 1 MHz | 25.6 MHz |
| TDS optimization: automatic | CISPR detector off | see TDS optimization "max speed" |
| | CISPR detector on | |
| | RBW = 200 Hz, 9 kHz, 1 MHz | see TDS optimization "dynamic" |
| | RBW = 120 kHz, CISPR band B, C | see TDS optimization "dynamic" |
| | RBW = 120 kHz, CISPR band D, E | see TDS optimization "max speed" |

| Time domain scan compliance to CISPR 16-1-1 | | |
|---|--|---|
| TDS optimization mode | automatic ⁸ | fully compliant |
| | max speed | |
| | standard | compliant for pulses with a repetition frequency ≥ 10 Hz |
| | with R&S®ESW-B350/-B350R/-B1000/-B1000R option | compliant for pulses with a repetition frequency ≥ 5 Hz |
| | dynamic | enhanced dynamic in CISPR band D for applications with requirements beyond CISPR 16-1-1 |

Measurement speed

| TDS optimization | automatic | max speed |
|--|----------------|----------------|
| CISPR band B, 150 kHz to 30 MHz | | |
| RBW = 9 kHz, measurement time = 100 ms, peak detector | | 110 ms (meas.) |
| RBW = 9 kHz, measurement time = 1 s, quasi-peak and CISPR-average detector | | 2 s (meas.) |
| CISPR band C/D, 30 MHz to 1000 MHz | | |
| RBW = 120 kHz, measurement time = 10 ms, peak detector | | |
| standard | 380 ms (meas.) | |
| R&S®ESW-B350/-B350R option | 49 ms (meas.) | |
| R&S®ESW-B1000/-B1000R option | 18 ms (meas.) | |
| RBW = 120 kHz, measurement time = 1 s, quasi-peak and CISPR-average detector | | |
| standard | 50 s (meas.) | 40 s (meas.) |
| R&S®ESW-B350/-B350R option | 22 s (meas.) | 5.2 s (meas.) |
| R&S®ESW-B1000/-B1000R option | 18.5 s (meas.) | 1.8 s (meas.) |
| RBW = 9 kHz, measurement time = 1 s, quasi-peak and CISPR-average detector | | |
| standard | 64 s (meas.) | 40 s (meas.) |
| R&S®ESW-B350/-B350R/-B1000/-B1000R option | 64 s (meas.) | 22.5 s (meas.) |
| RBW = 100 kHz, measurement time = 150 ms, peak detector | | |
| standard | 4.1 s (meas.) | |
| R&S®ESW-B350/-B350R option | 468 ms (meas.) | |
| R&S®ESW-B1000/-B1000R option | 155 ms (meas.) | |
| CISPR band E, 1 GHz to 6 GHz | | |
| RBW = 120 kHz, measurement time = 1 s, peak and CISPR-average detector | | |
| standard | 293 s (meas.) | |
| R&S®ESW-B350/-B350R option | 28 s (meas.) | |
| R&S®ESW-B1000/-B1000R option | 26 s (meas.) | |
| CISPR band E, 1 GHz to 18 GHz | | |
| RBW = 1 MHz, measurement time = 15 ms, peak detector | | |
| standard | 13.1 s (meas.) | |
| R&S®ESW-B350/-B350R/-B1000/-B1000R option | 11 s (meas.) | |
| 18 GHz to 40 GHz | | |
| RBW = 1 MHz, measurement time = 15 ms, peak detector | | |
| | 18 s (meas.) | |

Trigger functions

| Trigger | | |
|---|---------------------------------|---|
| Trigger source | analyzer mode | free run, video, external, IF power, RF power |
| | receiver mode | free run, video, external |
| Trigger offset | span \geq 10 Hz | 5 ns to 20 s |
| | span = 0 Hz | (-sweep time) to 20 s |
| Min. trigger offset resolution | span > 0 Hz | 5 ns |
| | span = 0 Hz, trigger offset > 0 | 5 ns |
| | span = 0 Hz, trigger offset < 0 | sweep time / number of sweep points |
| Max. deviation of trigger offset | | 5 ns |
| IF power trigger (analyzer mode) | | |
| Sensitivity | min. signal power | -60 dBm + RF attenuation – LNA gain (nom.) |
| | max. signal power | -10 dBm + RF attenuation – LNA gain (nom.) |
| IF power trigger bandwidth | RBW > 500 kHz | 20 MHz (nom.) ¹¹ |
| | RBW \leq 500 kHz, FFT | 20 MHz (nom.) |
| | RBW \leq 500 kHz, swept | 6 MHz (nom.) |
| RF power trigger (analyzer mode) | | |
| Sensitivity | min. signal power | -30 dBm + RF attenuation – LNA gain (nom.) |
| | max. signal power | +10 dBm + RF attenuation – LNA gain (nom.) |
| RF power trigger frequency range | f \leq 8 GHz | 8 GHz (nom.) |
| | f > 8 GHz | center frequency \pm 25 MHz (nom.) |
| Gated sweep | | |
| Gate source | | video, external, IF power, RF power |
| Gate delay | | 5 ns to 20 s, min. resolution: 5 ns |
| Gate length | | 5 ns to 20 s, min. resolution: 5 ns |
| Max. deviation of gate length | | \pm 5 ns |

Audio demodulator

| Demodulation | | |
|-----------------------------------|--|----------------------------|
| AF demodulation types | | AM and FM |
| Audio output | | loudspeaker and phone jack |
| Marker stop time in spectrum mode | | 100 ms to 60 s |

¹¹ Sweep optimization = auto.

Inputs and outputs

| RF input | | |
|------------------------------|--|---------------------------------------|
| Impedance | 50 Ω | |
| Connector | R&S®ESW8 | |
| | RF input 1, RF input 2 | N female |
| | R&S®ESW26 | |
| | RF input 1 | APC 3.5 mm male (compatible with SMA) |
| | RF input 2 | N female |
| | R&S®ESW44 | |
| | RF input 1 | 2.92 mm male (compatible with SMA) |
| | RF input 2 | N female |
| VSWR of R&S®ESW8 | RF attenuation ≤ 4 dB | |
| | 1 Hz ≤ f < 9 kHz, DC coupled | 2.0 (nom.) ¹² |
| | 9 kHz ≤ f < 10 MHz, DC coupled | < 2.0 |
| | 10 MHz ≤ f ≤ 1 GHz | < 2.0 |
| | 1 GHz < f ≤ 8 GHz | < 3.0 |
| | 5 dB ≤ RF attenuation ≤ 9 dB | |
| | 1 Hz ≤ f < 9 kHz, DC coupled | 1.5 (nom.) |
| | 9 kHz ≤ f < 10 MHz, DC coupled | < 1.5, typ. 1.20 ¹³ |
| | 10 MHz ≤ f < 1 GHz | < 1.5, typ. 1.20 ¹³ |
| | 1 GHz ≤ f < 3.6 GHz | < 1.5, typ. 1.31 ¹³ |
| | 3.6 GHz ≤ f ≤ 8 GHz | < 2.0, typ. 1.51 ¹³ |
| | RF attenuation ≥ 10 dB | |
| | 1 Hz ≤ f < 9 kHz, DC coupled | 1.2 (nom.) |
| | 9 kHz ≤ f < 10 MHz, DC coupled | < 1.2, typ. 1.09 ¹³ |
| | 10 MHz ≤ f < 1 GHz | < 1.2, typ. 1.09 ¹³ |
| | 1 GHz ≤ f < 3.6 GHz | < 1.5, typ. 1.19 ¹³ |
| | 3.6 GHz ≤ f ≤ 8 GHz | < 2.0, typ. 1.42 ¹³ |
| VSWR of R&S®ESW26, R&S®ESW44 | RF attenuation ≤ 4 dB | |
| | 1 Hz ≤ f < 9 kHz, DC coupled | 2.0 (nom.) ¹² |
| | 9 kHz ≤ f < 10 MHz, DC coupled | < 2.0 |
| | 10 MHz ≤ f ≤ 1 GHz | < 2.0 |
| | 1 GHz < f ≤ 40 GHz | < 3.0 |
| | 40 GHz < f ≤ 44 GHz | 3.0 (nom.) |
| | 5 dB ≤ RF attenuation ≤ 9 dB | |
| | 1 Hz ≤ f < 9 kHz, DC coupled | 1.5 (nom.) |
| | 9 kHz ≤ f < 10 MHz, DC coupled | < 1.5, typ. 1.24 ¹³ |
| | 10 MHz ≤ f ≤ 3.5 GHz | < 1.5, typ. 1.24 ¹³ |
| | 3.5 GHz < f ≤ 8 GHz | < 1.8, typ. 1.26 ¹³ |
| | 8 GHz < f ≤ 18 GHz | < 1.8, typ. 1.39 ¹³ |
| | 18 GHz < f ≤ 26.5 GHz | < 2.0, typ. 1.43 ¹³ |
| | 26.5 GHz < f ≤ 40 GHz | < 2.5, typ. 1.8 ¹³ |
| | 40 GHz < f ≤ 44 GHz | 2.0 (nom.) |
| | RF attenuation ≥ 10 dB | |
| | 1 Hz ≤ f < 9 kHz, DC coupled | 1.2 (nom.) |
| | 9 kHz ≤ f < 10 MHz, DC coupled | < 1.2, typ. 1.12 ¹³ |
| | 10 MHz ≤ f ≤ 3.5 GHz | < 1.2, typ. 1.12 ¹³ |
| | 3.5 GHz < f ≤ 8 GHz | < 1.5, typ. 1.19 ¹³ |
| | 8 GHz < f ≤ 18 GHz | < 1.5, typ. 1.25 ¹³ |
| | 18 GHz < f ≤ 26.5 GHz | < 2.0, typ. 1.37 ¹³ |
| | 26.5 GHz < f ≤ 40 GHz | < 2.5, typ. 1.7 ¹³ |
| | 40 GHz < f ≤ 44 GHz | 2.0 (nom.) |
| Setting range of attenuator | 0 dB to 79 dB, in 1 dB steps ¹⁴ | |

¹² Preselection off.¹³ Typical VSWR performance: performance expected to be met in 95 % of the cases with a confidence level of 95 %, temperature +20 °C to +30 °C, input set to "DC coupling". These values are not warranted and are subject to modification if a significant change in the statistical behavior of production instruments is observed.¹⁴ Mechanical RF attenuator: 5 dB steps; electronic IF attenuator: 1 dB steps.

| Probe power supply | | |
|--|--------------------------|--|
| Supply voltages, selectable | probe 1: 3-pin connector | +15 V DC, -12.6 V DC and ground, max. 150 mA (nom.) |
| | probe 2: 5-pin connector | ±10 V DC and ground, max. 100 mA (nom.) |
| USB interface | | |
| | | 7 ports, type A plug, version 2.0 |
| | | 1 port, type B plug, version 2.0 |
| AF output | | |
| Connector | | 3.5 mm mini-jack |
| Output impedance | | 10 Ω (nom.) |
| Open-circuit voltage | | up to 1.5 V, adjustable |
| External trigger/gate | | |
| Number of ports | | 1 x input, 2 x input/output, selectable |
| Connector | | BNC female |
| Trigger input voltage | | 0.5 V to 3.5 V (nom.) |
| Trigger output voltage | | TTL-compatible, 0 V/5 V (nom.) |
| Impedance | | 10 kΩ (nom.) |
| Reference input: 1 MHz to 50 MHz | | |
| Connector | | BNC female |
| Impedance | | 50 Ω (nom.) |
| Input frequency range | | 1 MHz ≤ f _{in} ≤ 50 MHz, in 1 Hz steps |
| Required level | | > 0 dBm |
| Reference input: 100 MHz/1 GHz | | |
| Connector | | SMA female |
| Impedance | | 50 Ω (nom.) |
| Input frequency range | | 100 MHz, 1 GHz |
| Required level | | 0 dBm to 10 dBm |
| Reference output: 10 MHz | | |
| Connector | | BNC female |
| Impedance | | 50 Ω (nom.) |
| Output frequency | | 10 MHz |
| Level | | 10 dBm (nom.) |
| Reference output: 1 MHz to 50 MHz | | |
| Connector | | BNC female |
| Impedance | | 50 Ω (nom.) |
| Output frequency | internal reference | not active |
| | external reference | same as reference input signal |
| Level | | same as reference input signal |
| Reference output: 100 MHz | | |
| Connector | | SMA female |
| Impedance | | 50 Ω (nom.) |
| Output frequency | | 100 MHz |
| Level | | 6 dBm (nom.) |
| Reference output: 640 MHz | | |
| Connector | | SMA female |
| Impedance | | 50 Ω (nom.) |
| Output frequency | | 640 MHz |
| Level | | 16 dBm (nom.) |

| IF/video output | | |
|-----------------------------|--|---|
| Connector | | BNC female, 50 Ω (nom.) |
| IF out | | |
| Bandwidth | | equal to RBW setting |
| IF frequency | | (RBW / 2) to (240 MHz – RBW / 2) |
| Output level | center frequency > 10 MHz, span = 0 Hz or I/Q analyzer on, signal at reference level and center frequency | 0 dBm (nom.) |
| Video out | | |
| Bandwidth | | equal to VBW setting |
| Output scaling | log. display scale | logarithmic |
| | lin. display scale | linear |
| Output level | center frequency > 10 MHz, span = 0 Hz, signal at reference level and center frequency | 1 V at 50 Ω load (nom.) |
| IEC/IEEE bus control | | |
| Command set | | SCPI 1997.0 |
| Connector | | 24-pin Amphenol female |
| Interface functions | | SH1, AH1, T6, L4, SR1, RL1, PP1, DC1, DT1, C0 |
| LAN interface | | |
| Connector | | 10/100/1000BASE-T RJ-45 |
| External monitor | | |
| Connectors | | DVI-D, DisplayPort Rev 1.1 |

General data

| | | |
|---|---|--|
| Display | 30.7 cm (12.1") WXGA color, multitouch screen | |
| Resolution | 1280 × 800 pixel (WXGA resolution) | |
| Pixel failure rate | < 1 × 10 ⁻⁵ | |
| Data storage | | |
| Internal | standard | solid-state disk ≥ 128 Gbyte |
| External | | supports USB 2.0 compatible memory devices |
| Temperature | | |
| Temperature | operating temperature range | +5 °C to +50 °C ¹⁵ |
| | permissible temperature range | 0 °C to +55 °C ¹⁵ |
| | storage temperature range | -40 °C to +70 °C |
| Climatic loading | without condensation | +40 °C at 90 % rel. humidity, in line with EN 60068-2-30 |
| Altitude | | |
| Max. operating altitude | above sea level | 4600 m (approx. 15100 ft) |
| Mechanical resistance | | |
| Vibration | sinusoidal | 5 Hz to 55 Hz, displacement: 0.15 mm constant amplitude (1.8 g at 55 Hz); 55 Hz to 150 Hz, acceleration: 0.5 g constant, in line with EN 60068-2-6 |
| | random | 8 Hz to 500 Hz, acceleration 1.2 g (RMS), in line with EN 60068-2-64 |
| Shock | | 40 g shock spectrum, in line with MIL-STD-810E, method no. 516.4, procedure I, MIL-PRF-28800F, class 3 |
| EMC | | in line with EMC Directive 2014/30/EU including: <ul style="list-style-type: none">• IEC/EN 61326-1 ^{16, 17}• IEC/EN 61326-2-1• CISPR 11/EN 55011 ¹⁶• IEC/EN 61000-3-2• IEC/EN 61000-3-3 |
| Recommended calibration interval | | 1 year |

¹⁵ With built-in R&S®ESW-B350/-B350R/-B1000/-B1000R option, the upper operating and permissible temperature with active time domain scan, TDS optimization: max speed, is limited to +40 °C.

¹⁶ Emission limits for class B equipment apply.

¹⁷ Immunity test requirement for industrial environment (EN 61326 table 2).

| Power supply | | |
|------------------------|------------------|--|
| AC input voltage range | | 100 V to 240 V |
| AC supply frequency | | 50 Hz to 60 Hz/400 Hz |
| Maximum input current | | 7.3 A (100 V) to 4.6 A (240 V) |
| Power consumption | R&S®ESW8 | |
| | without options | 150 W |
| | with all options | 390 W (meas.) |
| | R&S®ESW26 | |
| | without options | 175 W |
| | with all options | 420 W (meas.) |
| | R&S®ESW44 | |
| | without options | 200 W |
| | with all options | 440 W (meas.) |
| Safety | | in line with: IEC 61010-1, EN 61010-1, UL 61010-1, CAN/CSA-C22.2 No. 61010-1 |
| Test marks | | VDE, cCSA _{us} , CE, KCC |

| Dimensions and weight | | |
|------------------------------------|---|---|
| Dimensions (nom.) | W × H × D, including front handles and rear feet | 462 mm × 240 mm × 504 mm (18.15 in × 9.44 in × 19.81 in) |
| Net weight, without options (nom.) | R&S®ESW8 | 20.6 kg (45.42 lb) |
| | R&S®ESW26 | 22.1 kg (48.72 lb) |
| | R&S®ESW44 | 25.2 kg (55.56 lb) |

Options

R&S®ESW-B10 external generator control

| Interface | |
|------------------------------------|---|
| IEC/IEEE bus control | 24-pin Amphenol female |
| Aux control | 9-pin D-Sub female |
| Supported signal generators | |
| | R&S®SGS100A, R&S®SGT100A, R&S®SMA100A, R&S®SMA100B, R&S®SMB100A, R&S®SMB100B, R&S®SMBV100A, R&S®SMBV100B, R&S®SMC100A, R&S®SME, R&S®SMF100A, R&S®SMG, R&S®SMGL, R&S®SMGU, R&S®SMH, R&S®SMHU, R&S®SMIQ, R&S®SMJ100A, R&S®SML, R&S®SMP, R&S®SMR, R&S®SMT, R&S®SMU200A, R&S®SMV03, R&S®SMW200A, R&S®SMX, R&S®SMY |

R&S®ESW-B21 LO/IF connections for external mixers (not available for R&S®ESW8)

| LO signal | | |
|-----------------------------------|---|----------------------------------|
| Frequency range | | 7.65 GHz to 17.45 GHz |
| Level | +20 °C to +30 °C | +15.5 dBm ± 1.5 dB |
| | +5 °C to +40 °C | +15.5 dBm ± 3 dB |
| IF input | | |
| IF frequency | set signal analysis bandwidth ≤ 80 MHz, bandwidth-dependent | 1310 MHz to 1330 MHz |
| Full-scale level | compression < 1 dB 2-port mixer (LO output/IF input, front panel) 3-port mixer (IF input, front panel) | -20 dBm (nom.) -20 dBm (nom.) |
| Level uncertainty at IF frequency | IF input level = reference level = -25 dBm, RBW = 30 kHz, mixer conversion loss set to 0 dB, 2-port mixer, LO output/IF input connector (front panel) | |
| | +20 °C to +30 °C | < 1 dB |
| | +5 °C to +40 °C | < 3 dB |
| | IF input level = reference level = -25 dBm, RBW = 30 kHz, mixer conversion loss set to 0 dB, 3-port mixer, IF input connector (front panel) | |
| | +20 °C to +30 °C | < 1 dB |
| | +5 °C to +40 °C | < 3 dB |
| Inputs and outputs | | |
| LO output/IF input | | SMA female, 50 Ω |
| IF input | | SMA female, 50 Ω |

R&S®ESW-K980 health and utilization monitoring service (HUMS)

| Health and utilization monitoring service (HUMS) ^{18, 19} | | |
|--|---|---|
| Interfaces | protocols and interfaces supported for data readout and display | <ul style="list-style-type: none"> • SNMP (v1, v2c, v3) • REST (JSON) • SCPI • device web |
| Services | information provided | <ul style="list-style-type: none"> • device information (model, serial number, BIOS, date, time, system, HUMS and software information) • user-defined information tags (e.g. for asset management) • equipment information (hardware, options, software, licenses) • system operating status • instrument security information • service related information (due dates etc.) • mass storage related information • instrument utilization data • device history (event log) |

¹⁸ For details, see application note: www.rohde-schwarz.com/appnote/GFM336

¹⁹ For use with common available asset management tools.

Ordering information

| Designation | Type | Order No. |
|---|-----------|--------------|
| EMI test receiver, 1 Hz to 8 GHz | R&S®ESW8 | 1328.4100.09 |
| EMI test receiver, 1 Hz to 26.5 GHz | R&S®ESW26 | 1328.4100.27 |
| EMI test receiver, 1 Hz to 44 GHz | R&S®ESW44 | 1328.4100.45 |
| Accessories supplied | | |
| Power cable, quick start guide, R&S®ESW26: adapter 3.5 mm APC3.5-compatible female/female, R&S®ESW44: adapter 2.92 mm female/female | | |

Options

| Designation | Type | Order No. | Retrofittable | Remarks |
|--|----------------|--------------|---------------|---|
| OCXO precision frequency reference | R&S®ESW-B4 | 1328.5012.02 | yes | user-retrofittable |
| Resolution bandwidths up to 40 MHz | R&S®ESW-B8E | 1345.0167.02 | yes | for R&S®ESW8, R&S®ESW26, R&S®ESW44, user-retrofittable |
| Resolution bandwidths up to 80 MHz (hardware option) | R&S®ESW-B8 | 1325.1474.26 | no | for R&S®ESW8, R&S®ESW26 |
| Resolution bandwidths up to 80 MHz (hardware option) | R&S®ESW-B8 | 1325.1474.02 | no | for R&S®ESW44, export license required |
| External generator control | R&S®ESW-B10 | 1328.5006.02 | yes | contact service center |
| Spare solid-state drive (removable hard drive) | R&S®ESW-B18 | 1328.4997.10 | yes | user-retrofittable |
| LO/IF connections, for external mixers | R&S®ESW-B21 | 1331.6945.26 | yes | for R&S®ESW26, contact service center |
| LO/IF connections, for external mixers | R&S®ESW-B21 | 1331.6945.44 | yes | for R&S®ESW44, contact service center |
| Low-noise amplifier, 150 kHz to 8 GHz | R&S®ESW-B24 | 1328.4980.08 | yes | for R&S®ESW8, contact service center |
| Low-noise amplifier, 150 kHz to 26.5 GHz | R&S®ESW-B24 | 1328.4980.26 | yes | for R&S®ESW26, contact service center |
| Low-noise amplifier, 150 kHz to 44 GHz | R&S®ESW-B24 | 1328.4980.44 | yes | for R&S®ESW44, no export license required, contact service center |
| USB mass memory write protection | R&S®FSW-B33 | 1313.3602.02 | no | pre-installed in factory |
| 350 MHz FFT bandwidth, real-time bandwidth: 170 MHz, (hardware option) | R&S®ESW-B350 | 1345.0438.02 | yes | contact service center ²⁰ |
| 350 MHz FFT and real-time bandwidth, (hardware option) | R&S®ESW-B350R | 1351.1184.02 | yes | contact service center ²⁰ , export license required |
| 970 MHz FFT bandwidth, real-time bandwidth: 170 MHz, (hardware option) | R&S®ESW-B1000 | 1345.0421.02 | yes | contact service center ²⁰ |
| 970 MHz FFT and real-time bandwidth, (hardware option) | R&S®ESW-B1000R | 1351.1178.02 | yes | contact service center ²⁰ , export license required |

Firmware

| Designation | Type | Order No. | Retrofittable | Remarks |
|---|--------------|--------------|---------------|----------------------------|
| AM/FM/PM modulation analysis | R&S®ESW-K7 | 1331.6216.02 | | |
| Security write protection of solid-state drive | R&S®ESW-K33 | 1328.4916.02 | | |
| 80 MHz real-time measurement application | R&S®ESW-K55 | 1328.4968.02 | | no export license required |
| APD multichannel measurement function | R&S®ESW-K58 | 1345.0150.02 | | |
| Health and utilization monitoring service (HUMS) | R&S®ESW-K980 | 1345.0221.02 | | |

²⁰ For instruments starting from the following serial numbers: R&S®ESW8: 103055, R&S®ESW26: 103028, R&S®ESW44: 103048.

Upgrades

| Designation | Type | Order No. | Retrofittable | Remarks |
|---|----------------|--------------|---------------|---|
| 350 MHz FFT bandwidth, real-time bandwidth: 170 MHz (hardware option) | R&S®ESW-U351 | 1351.0813.02 | yes | contact service center ²¹ |
| 350 MHz FFT and real-time bandwidth, (hardware option) | R&S®ESW-U351R | 1351.1126.02 | yes | contact service center ²¹ , export license required |
| 970 MHz FFT bandwidth, real-time bandwidth: 170 MHz (hardware option) | R&S®ESW-U1001 | 1351.0820.02 | yes | contact service center ²¹ |
| 970 MHz FFT and real-time bandwidth, (hardware option) | R&S®ESW-U1001R | 1351.1110.02 | yes | contact service center ²¹ , export license required |
| 970 MHz FFT bandwidth, real-time bandwidth: 170 MHz, upgrade to R&S®ESW-B1000 | R&S®ESW-U1000 | 1351.0836.02 | yes | user-retrofittable, R&S®ESW-B350 or R&S®ESW-U351 required |
| 970 MHz FFT and real-time bandwidth, upgrade to R&S®ESW-B1000R | R&S®ESW-U1000R | 1351.1103.02 | yes | user-retrofittable, R&S®ESW-B350R or R&S®ESW-U351R required, export license required |

²¹ For instruments with the following serial numbers: R&S®ESW8: 103000 to 103054, R&S®ESW26: 103000 to 103027, R&S®ESW44: 103000 to 103047.

Recommended extras

| Designation | Type | Order No. |
|---|---------------------------|---------------------------------------|
| Headphones | | 0708.9010.00 |
| IEC/IEEE bus cable, length: 1 m | R&S®PCK | 0292.2013.10 |
| IEC/IEEE bus cable, length: 2 m | R&S®PCK | 0292.2013.20 |
| Front cover | R&S®ZZF-511 | 1174.8825.00 |
| 19" rack adapter | R&S®ZZA-KN5 | 1175.3040.00 |
| Matching pads, 50 Ω/75 Ω | | |
| L section, matching at both ends | R&S®RAM | 0358.5414.02 |
| Series resistor, 25 Ω, matching at one end (taken into account in instrument function RF INPUT 75 Ω) | R&S®RAZ | 0358.5714.02 |
| High-power attenuators | | |
| 100 W, 3/6/10/20/30 dB, 1 GHz | R&S®RBU100 | 1073.8495.xx (xx = 03/06/10/20/30) |
| 50 W, 3/6/10/20/30 dB, 2 GHz | R&S®RBU50 | 1073.8695.xx (xx = 03/06/10/20/30) |
| 50 W, 20 dB, 6 GHz | R&S®RDL50 | 1035.1700.52 |
| RF adapters and cables | | |
| Coaxial adapter, 2.92 mm (f) – 2.92 mm (f) | | 3588.8664.00 |
| Coaxial adapter, 3.5 mm (f) – 3.5 mm (f), APC3.5-compatible | | 3587.7793.00 |
| Coaxial adapter, 3.5 mm (m) – 3.5 mm (m), APC3.5-compatible | | 3689.9442.00 |
| Coaxial adapter, N (f) – 3.5 mm (m), APC3.5-compatible | | 3587.7806.00 |
| Coaxial adapter, N (f) – 3.5 mm (f), APC3.5-compatible | | 3587.7829.00 |
| Coaxial cable, SMA (m) – SMA (m), length: 1 m | | 3586.9970.00 |
| Connectors and cables | | |
| Probe power connector, 3-pin | | 1065.9480.00 |
| DC block | | |
| DC block, 10 kHz to 18 GHz (type N) | R&S®FSE-Z4 | 1084.7443.03 |
| External harmonic mixers (for R&S®ESW26 and R&S®ESW44 with R&S®ESW-B21 option) | | |
| Harmonic mixer, 40 GHz to 60 GHz | RPG FS-Z60 ²² | 1048.0171.02 |
| Harmonic mixer, 50 GHz to 75 GHz | RPG FS-Z75 ²² | 3638.2240.02 |
| Harmonic mixer, 60 GHz to 90 GHz | RPG FS-Z90 ²² | 3638.2270.02 |
| Harmonic mixer, 75 GHz to 110 GHz | RPG FS-Z110 ²² | 3638.2292.02 |
| Harmonic mixer, 90 GHz to 140 GHz | RPG FS-Z140 ²² | 3622.0708.02 |
| Harmonic mixer, 110 GHz to 170 GHz | RPG FS-Z170 ²² | 3622.0714.02 |
| Harmonic mixer, 140 GHz to 220 GHz | RPG FS-Z220 ²² | 3593.3250.02 |
| Harmonic mixer, 220 GHz to 325 GHz | RPG FS-Z325 ²² | 3593.3267.02 |
| Waveguide to coaxial adapters | | |
| Waveguide to coaxial adapter, WR10 to 1 mm (f) | WCA110 | 3626.1067.02 |
| Waveguide to coaxial adapter, WR10 to 1 mm (m) | WCA110 | 3626.1067.03 |
| Waveguide to coaxial adapter, WR12 to 1 mm (f) | WCA90 | 3626.1050.02 |
| Waveguide to coaxial adapter, WR12 to 1 mm (m) | WCA90 | 3626.1050.03 |
| Waveguide to coaxial adapter, WR15 to 1 mm (f) | WCA75 | 3626.1044.02 |
| Waveguide to coaxial adapter, WR15 to 1 mm (m) | WCA75 | 3626.1044.03 |
| Horn antennas | | |
| Horn antenna, 110 GHz to 170 GHz | FH-SG-170 | 3629.2493.02 |
| Horn antenna, 26 GHz to 40 GHz | FH-SG-40 | 3629.2393.02 |
| Horn antenna, 50 GHz to 75 GHz | FH-SG-75 | 3629.2458.02 |
| Horn antenna, 60 GHz to 90 GHz | FH-SG-90 | 3629.2464.02 |
| Tools | | |
| Torque wrench, for type N connectors, 1.5 Nm coupling torque (for R&S®ESW8) | R&S®ZN-ZTW | 1328.8534.71 |
| Torque wrench, for 3.5 mm/2.92 mm connectors, 0.9 Nm coupling torque (for R&S®ESW26, R&S®ESW44) | R&S®ZN-ZTW | 1328.8534.35 |

²² RPG is the abbreviation of Radiometer Physics GmbH, a Rohde & Schwarz company.

Warranty and service

| Warranty | | |
|--|--------------------------------|-----------------------|
| Base unit | | 1 year |
| All other items | | 1 year |
| Service options | | |
| Calibration | up to five years ²³ | pay per calibration |
| Warranty and repair | up to five years ²³ | standard price repair |
| Find out more about our service portfolio under: | | |
| www.rohde-schwarz.com/service-support/service/overview/service-overview_229461.html | | |

²³ For extended periods, contact your Rohde & Schwarz sales office.

Service at Rohde & Schwarz

You're in great hands

- Worldwide
- Local and personalized
- Customized and flexible
- Uncompromising quality
- Long-term dependability

Rohde & Schwarz

The Rohde & Schwarz technology group is among the trailblazers when it comes to paving the way for a safer and connected world with its leading solutions in test & measurement, technology systems and networks & cybersecurity. Founded 90 years ago, the group is a reliable partner for industry and government customers around the globe. The independent company is headquartered in Munich, Germany and has an extensive sales and service network with locations in more than 70 countries.

www.rohde-schwarz.com

Sustainable product design

- Environmental compatibility and eco-footprint
- Energy efficiency and low emissions
- Longevity and optimized total cost of ownership

Certified Quality Management
ISO 9001

Certified Environmental Management
ISO 14001

Rohde & Schwarz training

www.training.rohde-schwarz.com

Rohde & Schwarz customer support

www.rohde-schwarz.com/support



R&S® is a registered trademark of Rohde & Schwarz

Trade names are trademarks of the owners

PD 3607.2810.22 | Version 12.00 | February 2024 (jr)

R&S®ESW EMI Test Receiver

Data without tolerance limits is not binding | Subject to change

© 2016 - 2024 Rohde & Schwarz | 81671 Munich, Germany